


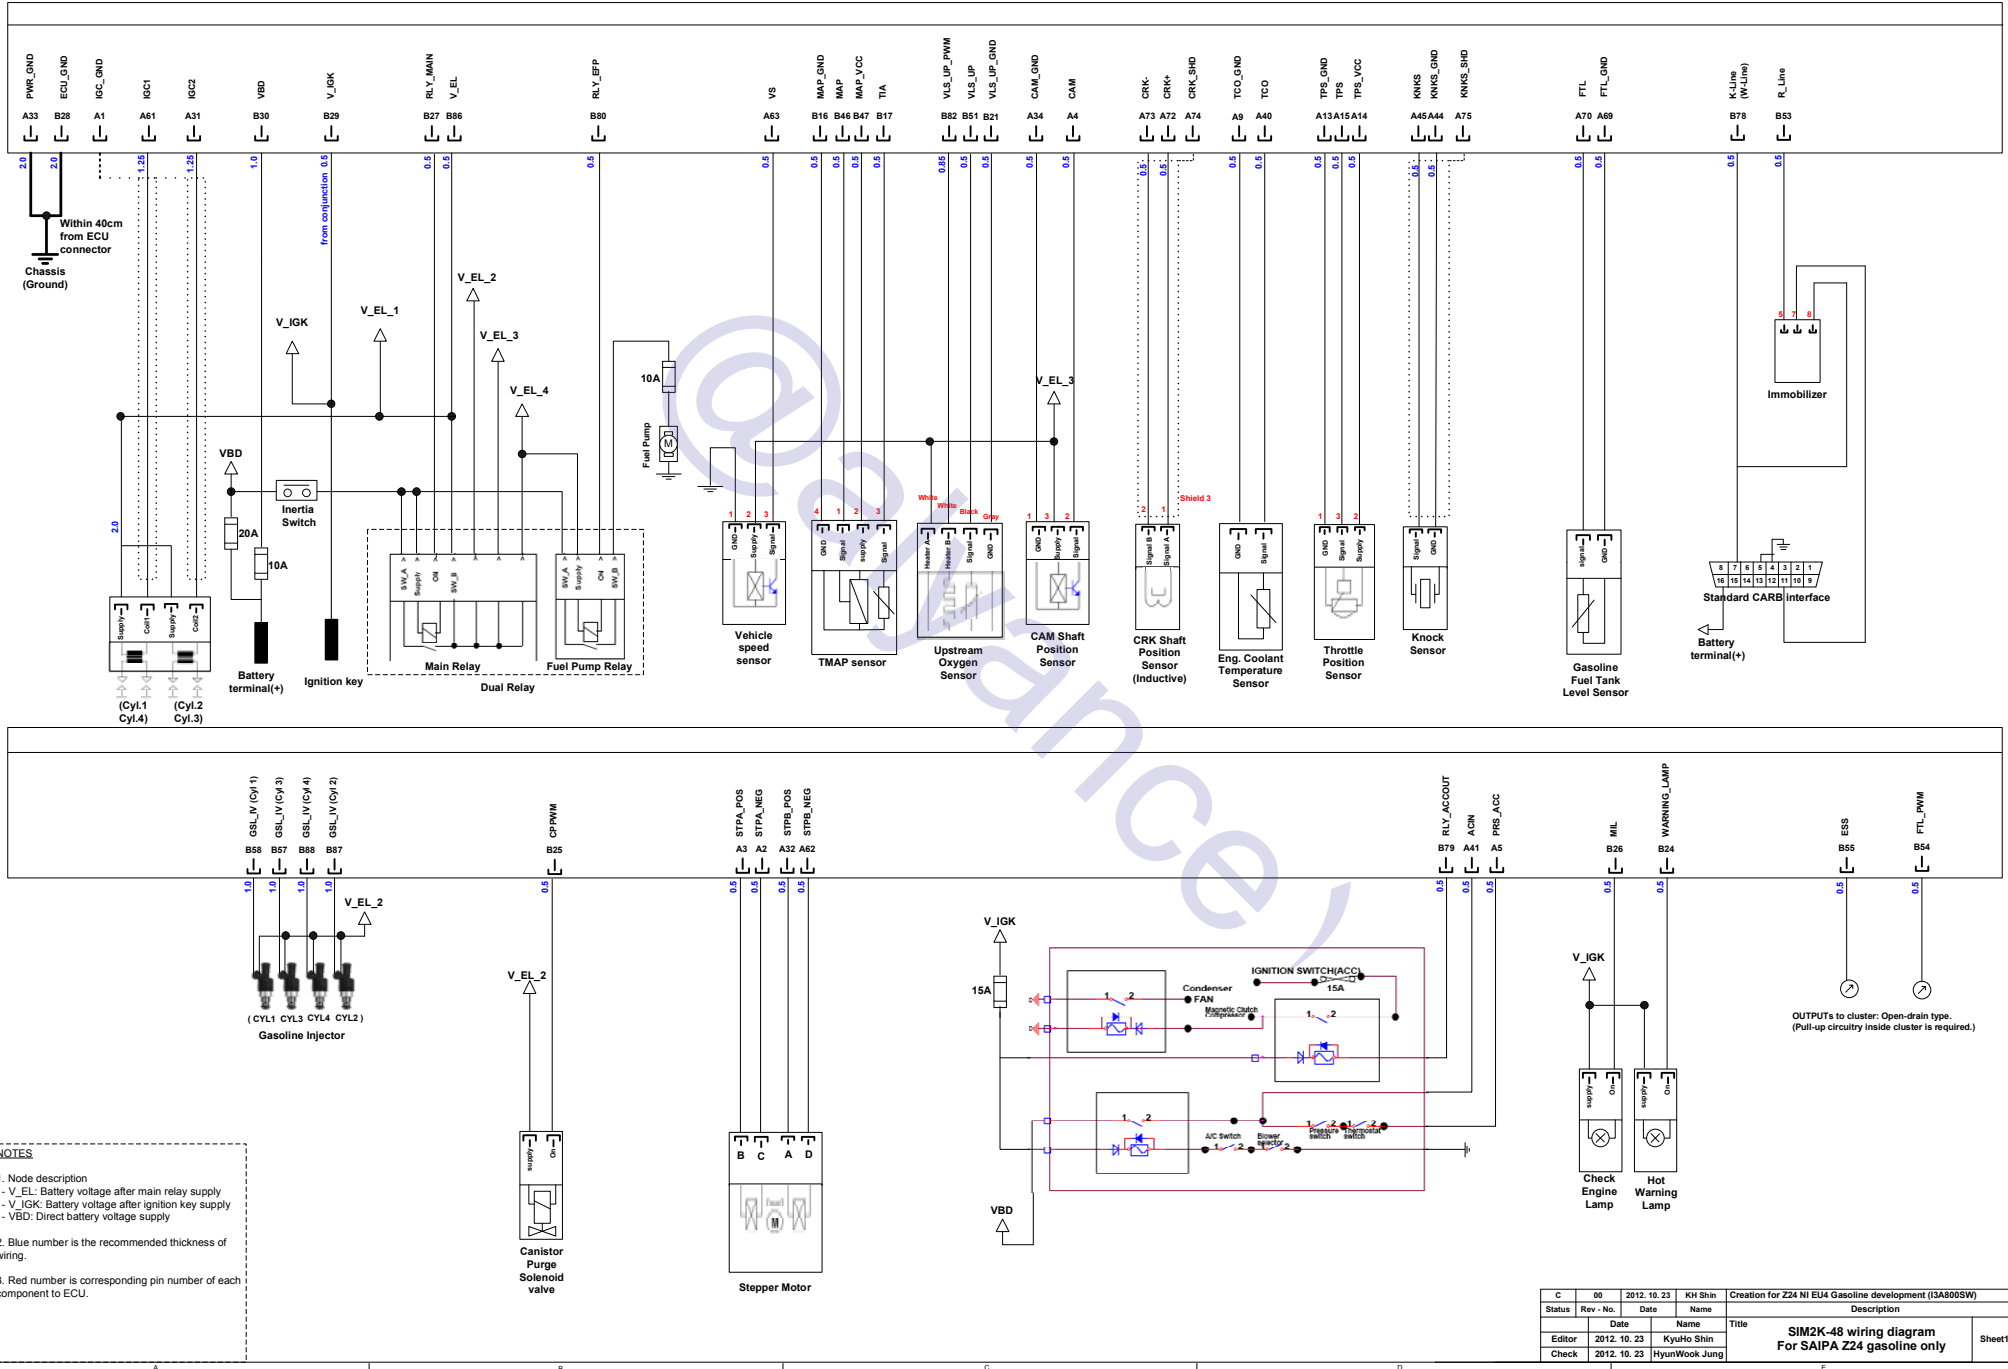

**NOTES**

- Node description
  - V\_EL: Battery voltage after main relay supply
  - V\_IGK: Battery voltage after ignition key supply
  - VBD: Direct battery voltage supply
- Blue number is the recommended thickness of wiring.
- Red number is corresponding pin number of each component to ECU.

| C      | 00           | 2012. 10. 23  | KH Shin | Creation for Z24 NI EU4 Gasoline development (13A8005W) |
|--------|--------------|---------------|---------|---------------------------------------------------------|
| Status | Rev - No.    | Date          | Name    | Description                                             |
|        |              | Date          | Name    | Title                                                   |
| Editor | 2012. 10. 23 | KyuHo Shin    |         | SIM2K-48 wiring diagram For SAIPA Z24 gasoline only     |
| Check  | 2012. 10. 23 | HyunWook Jung |         | Sheet/1                                                 |