


PART TIME 4WD (EST) SYSTEM

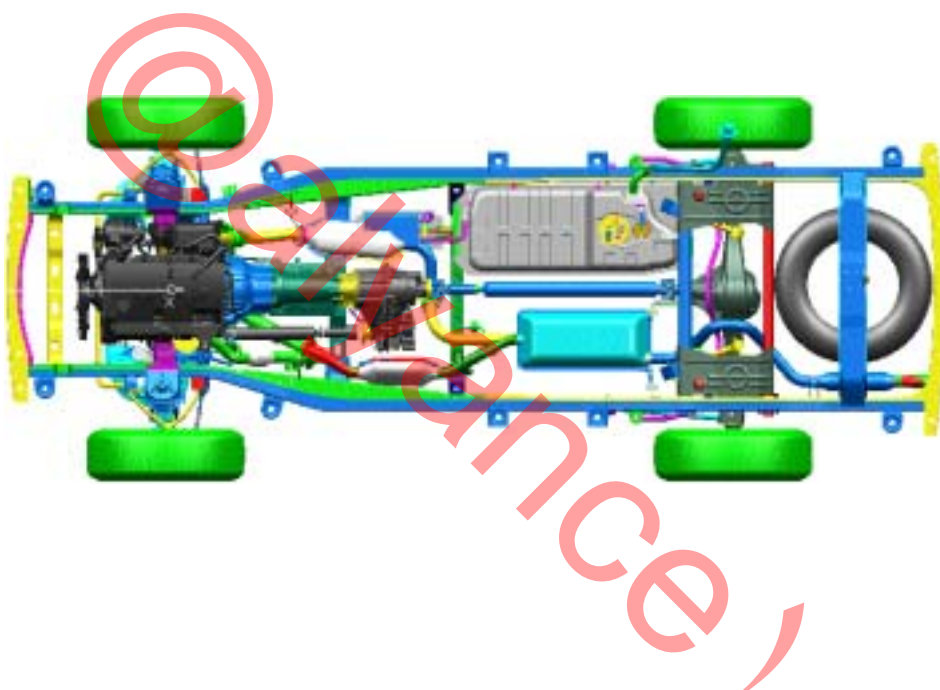

EST (Electronic Shift Transfer)

CONTENTS

1. BASIC THEORY OF 4WD

- 1.1 2WD AND 4WD -----
- 1.2 FULL TIME 4 WHEEL DRIVE VS. ALL WHEEL DRIVE (AWD) -----
- 1.3 ADVANTAGES AND DISADVANTAGES OF 4WD -----
- 1.4 BASIC LAYOUT OF 4WD -----
- 1.5 LSD OF 4WD -----

2. SORENTO 4WD SYSTEM

- 2.1 4WD SPECIFICATION -----
- 2.2 SYSTEM CONSTRUCTION(EST,TOD) & OPERATING CONDITION -----

3. EST (ELECTRONIC SHIFT TRANSFER)

- 3.1 INTRODUCTION -----
- 3.2 KINDS OF SOFT SYSTEM IN PART TIME 4WD -----
- 3.3 FRRD(FREE RUNNING DIFFERENTIAL) -----
- 3.4 COMPONENTS -----
- 3.5 POWER FLOW -----
- 3.6 COMPONENTS -----
- 3.7 INPUT & OUTPUT -----
- 3.8 DIAGNOSIS -----

4. TRANSFER OVERHAUL

- 4.1 DISASSEMBLY -----
- 4.2 ASSEMBLY -----

1. BASIC THEORY OF 4WD

1.1 2WD AND 4WD

Engine power enables a vehicle to get moving and to continue moving. To transfer the engine power into moving force an equal amount of traction is needed.

Traction is the resistance or friction happening between each tire and the ground surface. In 2WD the traction of only two wheels is used. The other two tires have traction as well, but they are just rolling along, in rear wheel drive vehicles they are used to steer the vehicle.

If more torque is applied than there is traction available, the 2 tires will lose its grip and start spinning. So, if in need of more power/torque to move more weight or to go faster more traction is needed. That can be achieved by mounting larger tires with a larger footprint or sending some of the torque to the other two wheels (4WD) and using their traction as well.

So, in 2WD power is divided towards 2 tires and the traction of those two tires has the burden of supporting the engine's power - each powered tire has deal with 50% of the available torque. In 4WD power is divided towards 4 tires. In 4WD the traction at each powered tire has to deal only with 25% of the torque created by engine, transmission, transfer case, and axle. Since each tire in 4WD has to carry a much smaller torque load (25% instead of 50%), it is much less likely for the tires to lose its grip. That is why a 4WD can climb much steeper grades than a 2WD. Because much more torque is needed to move the vehicle up a steep grade, and only when the torque load is spread out over 4 tires instead of 2 tires it is supported by sufficient traction.

All this is true with all 4 tires on the same surface and each wheel loaded down with 25% of the vehicle's weight. The very moment one tire gets onto a surface with less friction (resulting in less traction) than the other wheels - at least one differential will start acting up. The very moment one tire, due to rolling into a small rut for example, gets to carry less than 25% of the vehicle's weight (also resulting in less traction).

The wheel with less traction will receive more than 25% of the torque (power is always following the path of least resistance) the wheel with more traction will get less torque. The opposite wheel will get little or no torque and cannot keep the vehicle moving. 4WD was invented to use the traction of all 4 tires to either move more weight or drive on surfaces with marginal traction, or both.

Differential locks and traction control are invented to counteract the "stupid" differential's intention of wasting torque on wheels with little or no traction. All driven axles have to have a differential to make it possible in turns to send more rpm and more torque to the outside wheel and less rpm and less torque to the inside wheel of a turn.

SORENTO PART TIME 4WD SYSTEM (EST)

In general:

- 4WD is helpful to get moving and supports directional stability.
- 4WD is not helpful to go faster.
- 4WD is not helpful to stop the vehicle.

1.2 FULL TIME 4 WHEEL DRIVE VS. ALL WHEEL DRIVE (AWD)

Full time four wheel drive (not part time 4WD) is a system that powers all four wheels at all times. Each tire gets about 25% of the available torque. Driver has a choice of a "4-high" and "4-low".

When "4-low" is selected the wheels receive substantially more (on Terracan of HMC and Sorento of KMC, its 2.48 times more) power than in "4-high", at the same time the vehicle moves at substantially slower speeds (2.48 times slower).

The low setting is an advantage for drivers who need to tow and maneuver a heavy trailer etc and for drivers who at one point or another may want to negotiate difficult off-road terrain.

All wheel drive is a system that powers all four wheels of a vehicle at all times as well. Difference to full time 4WD is that "4-low" is not available. Due to the lack of "low range" AWD vehicle are much less capable than 4WD vehicles.

1) All Wheel Drive (AWD)

- Only mode is 4WD full time, - No 2WD available, - No 4WD "low" available,
- Center differential locks automatically (Torsen diff, viscous coupling),
- Almost useless beyond pavement, - No transfer case

2) Full Time 4WD

- Main mode is 4WD. 4WD is used full time.
- No 2WD mode available.
- All four wheels are powered at all times. Operates well on dry pavement due to a center differential or equivalent device (viscous coupling, planetary gears).
- Part Time 4WD does not have a center differential. A center differential is essential for on-road use but can be detrimental for off-pavement use. When leaving pavement the center differential needs to be disabled (locked). It either locks automatically or it has to be locked (disabled) manually.
- Normal setting for on-road use and light duty off-road use is 4WD "high"
- For more torque 4WD "low", also called low range, is available. Low range substantially provides more torque to the wheels and allows slower speeds than in high range. 4 low does not provide more traction. It only provides more torque.

SORENTO PART TIME 4WD SYSTEM (EST)

3) Part Time 4 Wheel Drive

- Main mode is 2 wheel drive for everyday pavement use. Only rear wheels are powered. (In some cases front wheels are powered instead)
- When needed (usually beyond pavement) 4WD can be engaged. (4WD is used part time)
- When 4WD is engaged front wheels are powered as well.
- There are two different settings for 4WD "high" and "low"
- 4WD "high", called high range, cannot be used on dry pavement with a "part time " system.
- For extreme situations 4WD "low" is available, it cannot be used on dry pavement either. 4WD "low", also called low range does not provide more traction. However, it provides two to three times more torque at about half or a third of the speeds in high range.

1.3 ADVANTAGES AND DISADVANTAGES OF 4WD

1) Traction and Grip :

Apparently, 4-wheel drive brings traction and grip to higher level because the tractive effort is shared by 4 wheels instead of two. This enable higher cornering limit, especially in rough roads and wet condition. Since it was introduced in 1980 to rally cars, 4WD proved its superiority in this aspect.

2) Weight penalty and power loss :

Because the driving mechanism of the additional wheels has frictional loss, 4WD consumes a little bit more power than 2WD cars. Anyway, this is still a fraction compare with the increased weight. Most 4WD systems weigh 50kg-100kg more than a 2WD system, thus deteriorate acceleration as well as fuel consumption.

3) Steering tendency :

As mentioned in our study of handling, in theory, permanent 4WD cars generate neutral steering tendency, thanks to the tractive force sharing by all 4 wheels. However, in reality this become much more complicated. Steering tendency can also be corrected by weight distribution, the adjustment of camber and castor, the choice of different size tires in front and rear etc. Moreover, it is widely agreed that a slight oversteering, if could be accurately controlled by throttle and steering, is even more satisfying than neutral steering. In contrast, most 50:50 permanent 4WD cars can hardly enable oversteering, unless in really slippery surface.

4) Steering feel :

Depends on tuning, some 4WD cars deliver less steering feel, since the presence of torque in the front wheels may generate slightly torque steer. However, most modern 4WD cars overcame this problem.

SORENTO PART TIME 4WD SYSTEM (EST)

1.4 BASIC LAYOUT OF 4WD

A modern 4-wheel drive system must have 3 differentials - one in the front axle to distribute torque between the left and right front wheels, one in the rear axle again responsible for torque distribution, the third one, called Center Differential, distributes torque between front and rear axles.

We all know the objective of differential. During cornering, the outside wheels have to travel faster than the inside wheels, therefore we need a differential to distribute different torque to the wheels. For a 4WD car, we in addition need the Center Differential because the front wheels have to travel faster than the rear wheels. The following diagram illustrates this:



If without the center differential, the non-conformance of front and rear wheel speed will lead to tire slip as well as energy losses, tire roar, wear of tires etc. Therefore center differential is a must for modern cars.

1.5 LSD OF 4WD

However, just the 3-differential layout alone cannot cope with the basic requirement for 4WD - provides superior grip in the worst roads. In real world driving, for instance, when pushing the car over its limit in corner, or running on slippery surface, tire slip is inevitable. When a wheel loses traction, a normal differential will transfer nearly all the driving torque to that wheel. As a result, the spinning wheel will spin even wilder, but the wheel having traction will never share driving torque, therefore the car will be difficult to get out of the trouble. This problem occurs in all kinds of car, no matter 2-wheel drive or 4WD, but it is relatively more important to 4WD because 4WD cars are designed to run in worse roads or cornering harder.

Therefore 4WD cars (or even many latest 2WD sports cars) need Limited Slip Differential (LSD). A LSD lock up both drive shafts whenever tire slip occurs, thus helps the car get out of trouble quickly. The result is enhanced stability and even higher cornering limit.

In fact, LSD is the core of 4WD technology. There are several types of LSD: Torsion LSD, Viscous Coupling LSD, VC differential lock and Active LSD. They have different effectiveness, characteristic and cost so that car makers choose them according to their needs.

Regarding 4WD vehicle such as Santa-Fe(for rear diff.) of Hyundai motors and Sportage, Sorento of Kia motors, Carbon Disc LSD is adapted for the rear as an option.

SORENTO PART TIME 4WD SYSTEM (EST)

2. SORENTO 4WD SYSTEM

2.1 4WD SPECIFICATION

EST: Electrical Shift Transfer is standard on all models and trims for part-time 4WD, allowing drivers to “shift on the fly” between two- and four-wheel-drive modes at speeds up to 80 km/h.


ATT: Active Torque Transfer (or “Torque-on-Demand”) electronically transfers power and torque from the rear to the front as required, enhancing off-road traction, handling agility and steering precision.

[Comparison between the Part Time 4WD and the Full Time 4WD]


Items	Parts time	Full time
Engine	DSL : 2.5	GSL 2.4, 3.5
Type	Electronic shift transfer	Active torque transfer
Model	BWA 44-24 ESOF	BWA 44-24 TOD
FRT axle connection	FRRD	No FRRD (Full time connection)
Weight (Kg), Length(mm)	35, 351	37.3, 351
Gear ratio (HIGH)	1 : 1	
Gear ratio (LOW)	2.48 : 1	
FRT driving type	Chain	
Lubricant	DEXRON III	
Lub. Quantity (L)	1.42	
FRRD motor	○	×
Front speed sensor	×	Hall IC effect type
Rear speed sensor	Pulse generator	Hall IC effect type
Vehicle speed sensor	Hall IC effect type	Hall IC effect type

SORENTO PART TIME 4WD SYSTEM (EST)

2.2 SYSTEM CONSTRUCTION (EST, TOD) & OPERATING CONDITION

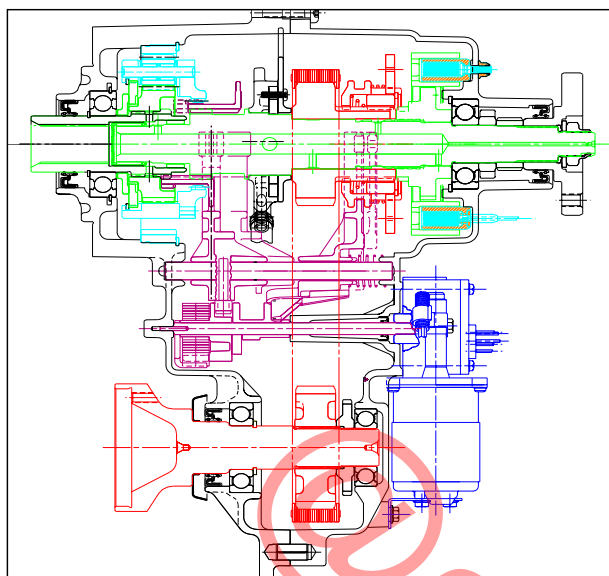

[EST]

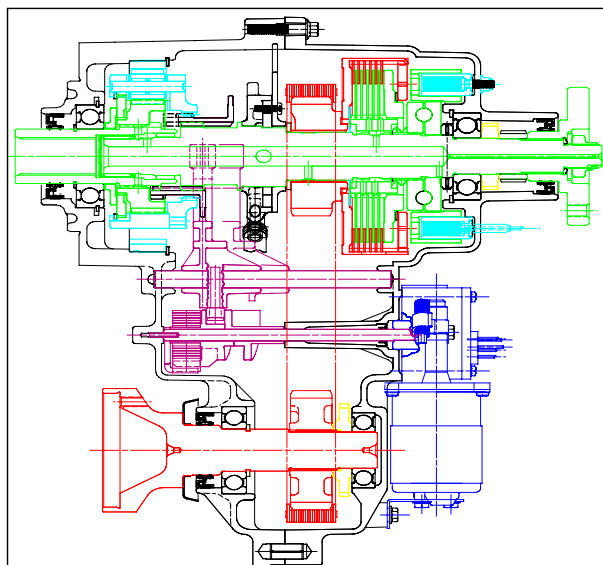

[TOD]

Drive type	Drive item	Drive mode	Drive status	Useful condition
Electric Shift Transfer (EST type)	Drive mode	2H	2WD, Rear wheel drive	Use on the roadway.
		4H	4WD HIGH	* Use on the off-road or snowy and rainy road having slippery road surface. * When turning on the roadway at low speed, vibration and noise happens by tight corner braking.
		4L	4WD LOW	Use in the condition which driving force is required like escaping from rough way and towing.
	Transfer	2H ↔ 4H	2WD ↔ 4WD	Possible to transfer 2WD into 4WD and vice versa at 80kph or below during driving.
		4H ↔ 4WD(L)	4WD(H) ↔ 4WD(L)	* Necessary to stop the vehicle for transfer - M/T vehicle : Transfer after pressing the clutch pedal. - A/T vehicle: Transfer after positioning the A/T lever to "N". * All vehicles with 4L mode should stop the vehicle for transfer.
Active Torque Transfer (ATT type)	Drive mode	AUTO	2WD ↔ 4WD	* Use on the various road surfaces including roadway, off-road, or snowy and rainy road surface. * Using multiple clutch, control the revolution difference between front and rear wheels electronically. So this mode can correspond to the various road surfaces by controlling the ATT unit automatically.
		LOW	4WD LOW	Refer to 4L of part time.
	Transfer	AUTO ↔ LOW	4WD(H) ↔ 4WD(L)	* Necessary to stop the vehicle for transfer - M/T vehicle: Transfer after pressing the clutch pedal. - A/T vehicle: Transfer after positioning the A/T lever to "N". * All vehicles with 4L mode should stop the vehicle for transfer.

SORENTO PART TIME 4WD SYSTEM (EST)


3. EST (ELECTRONIC SHIFT TRANSFER)

3.1 INTRODUCTION

EST system is a kind of part time 4wheel drive system and its full name is 'Electronic shift transfer'. Instead of the free wheel hub type adapted by Sportage, FRRD (Free Running Differential) type of SOTF(Shift on the fly) system is employed.

When a vehicle runs with 2WD mode, front axle will rotates idly due to the vehicle speed. Driving chain inside transfer rotates along with the front wheel revolution making a noise and vibration through the propeller shaft. To prevent this, a device, FRRD system is required to cut the connection between the front wheel and the transfer.

When 4WD mode is selected by driver, FRRD air pump motor operates and a dog clutch in FRRD is engaged to pinion shaft making a front wheels drive. Therefore the front propeller shaft and the front drive shaft is coupled rotating together. Oppositely, if 2WD is selected by a driver, the dog clutch in a FRRD is disengaged resulting in disconnection between the front propeller shaft and the front drive shaft.

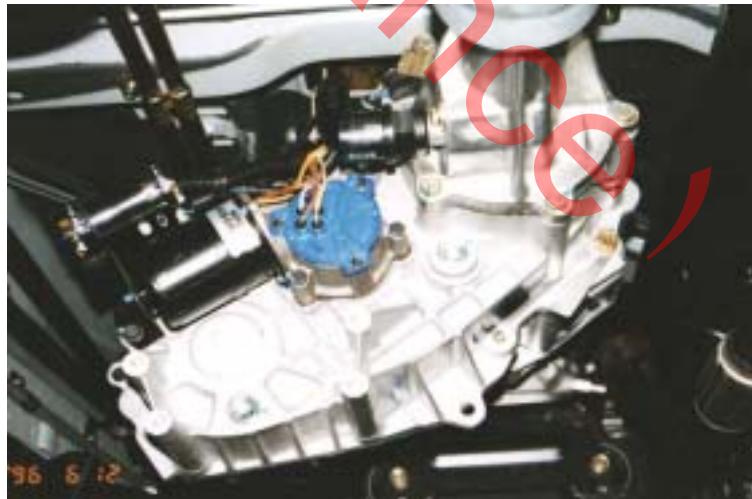


[EST Transfer Case]

SORENTO PART TIME 4WD SYSTEM (EST)

3.2 KINDS OF SOTF SYSTEM IN PART TIME 4WD


1) CAM type auto free wheel hub

- Application vehicle : HMC Galloper
- For 2WD from 4WD, vehicle should be moved backward 1 or 2 meters approximately.

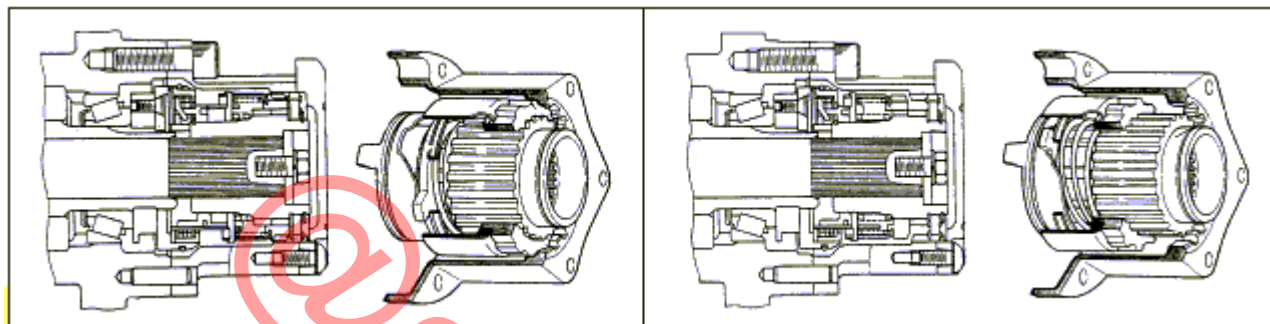

2) Vacuum type free wheel hub



- Application vehicles : HMC H-1, KMC Sportage
- SOTF is activated in condition of 40km/h or less.
- In respect of durability, it is difficult to prevent the air leakage on the wheel end side.

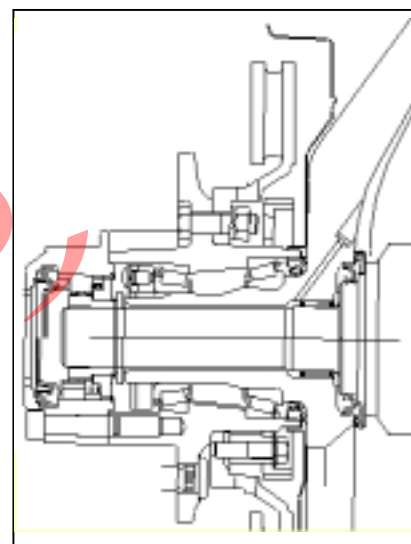

SORENTO PART TIME 4WD SYSTEM (EST)

3) CADS (Center axle disconnect system) type

- Application vehicles : HMC Terracan, MMC Pajero, Challenger, Big horn, Surf
- SOTF is activated at 80km/h or less.

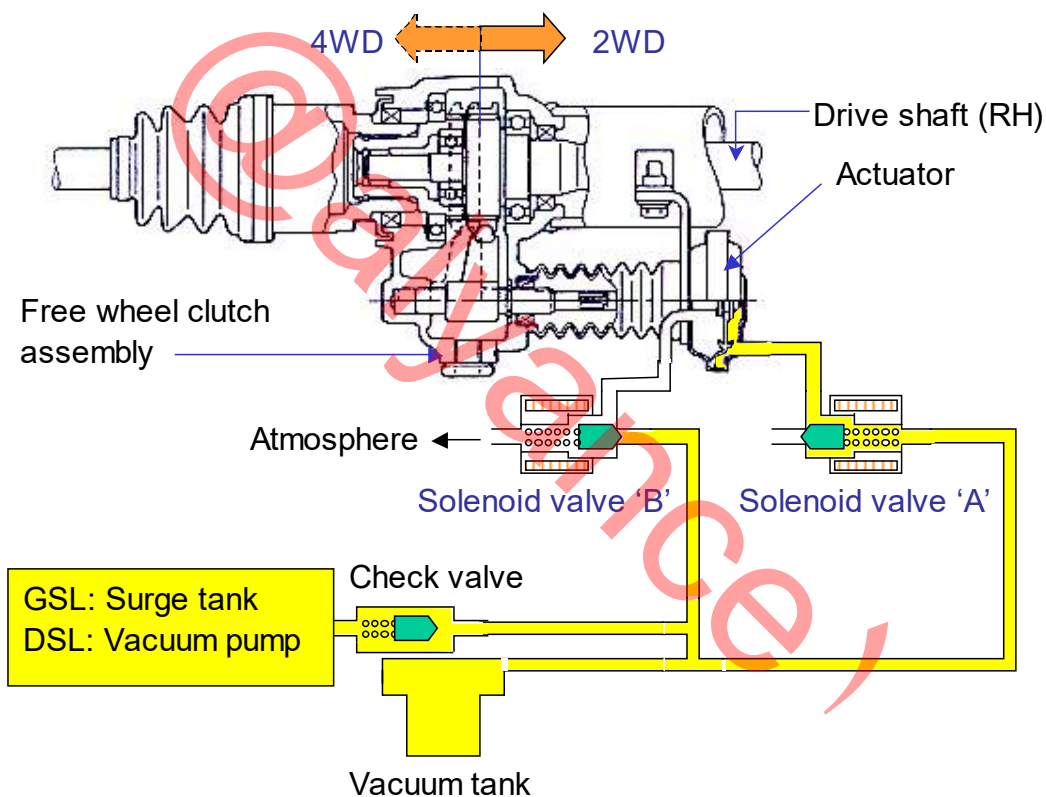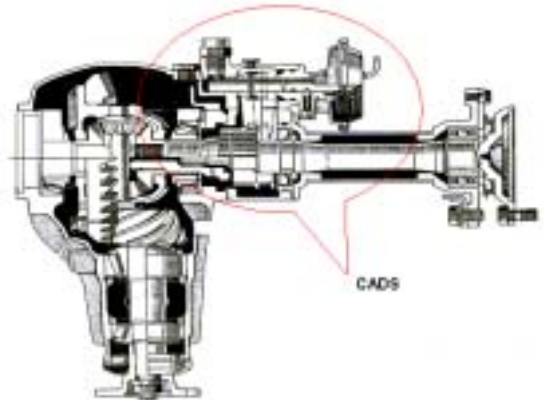

When 2WD is selected by driver, the shift fork of the CADS moves by the pressure difference of each side of the diaphragm inside actuator. It results disconnection between axle shaft and differential shaft. Oppositely, if 4WD is selected by driver, the axle shaft and differential shaft is connected so as to be driven by 4WD.

4) FRRD (Free Running Differential) : refer to the following chapter.

3.3 FRRD(FREE RUNNING DIFFERENTIAL)

SOTF(Shift On The Fly) system for Sorento is a FRRD type. Sportage, previous KIA 4WD model, has incorporated two types of SOTF system one is a CAM type auto free wheel hub system used till 1999 model, the other type is a Vacuum type free wheel hub system.

A vacuum type has made better performance than a CAM type. But it still has a problem like an air leaking in a hub which is exposed all the time.

FRRD is installed in the front axle. A driver selects 4WD mode, air pump motor is energized and a dog clutch is engaged connecting a front propeller shaft and a front drive shaft. If a driver selects 2WD mode on driving, the dog clutch is disengaged disconnecting the drive force to a drive shaft.





[FRRD case]



[FRRD outer case]

SORENTO PART TIME 4WD SYSTEM (EST)


[ADVANTAGES OF FRRD]

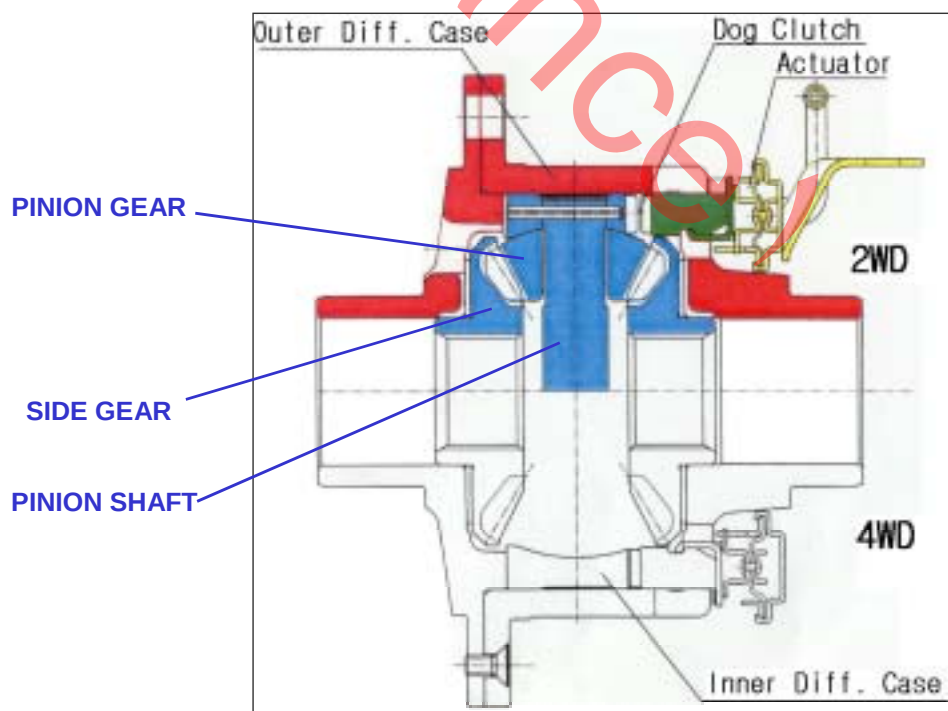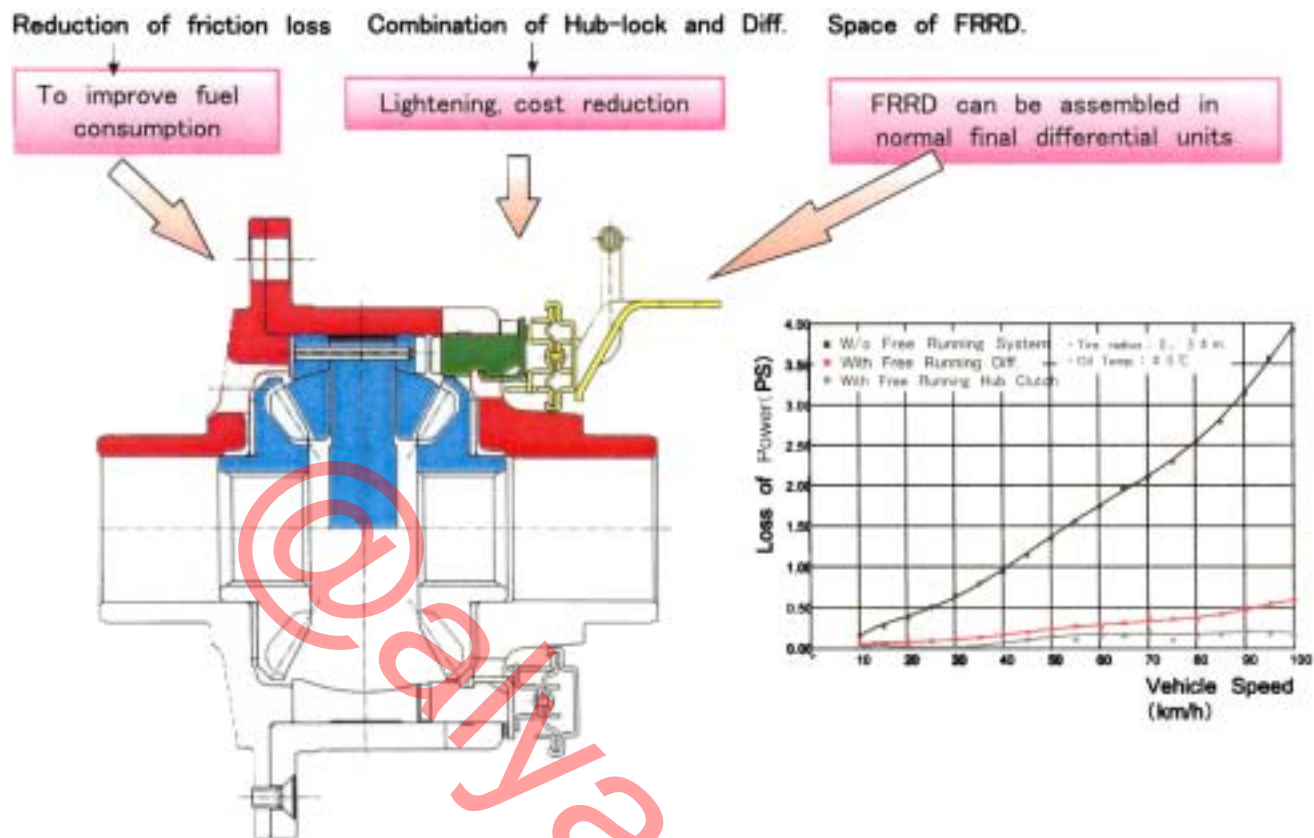


[FRRD section]

[FRRD OPERATION]

Cam ring returns by a return spring, connection with the inner case is off to a 2WD mode.

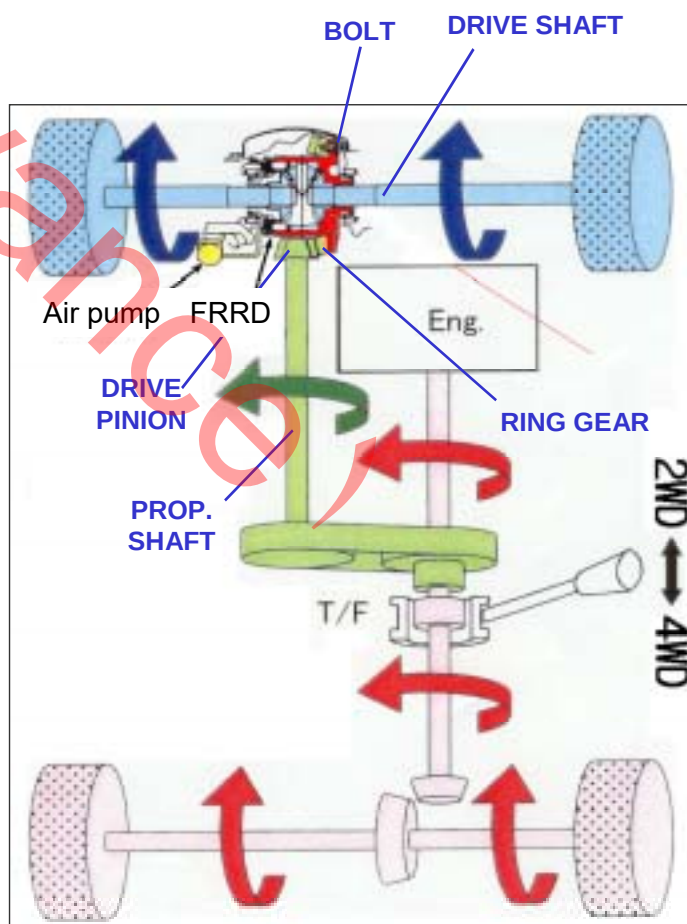


The diagram illustrates the powertrain layout of a vehicle. At the top, the **ENGINE** is shown connected to a drive shaft. This shaft passes through a **TRANSFER** case, which contains a differential. The drive shaft then splits into two axle shafts, each leading to a wheel. Arrows indicate the flow of **DRIVING FORCE** from the engine, through the transfer case, and to the wheels. A large red watermark is visible across the lower half of the diagram.

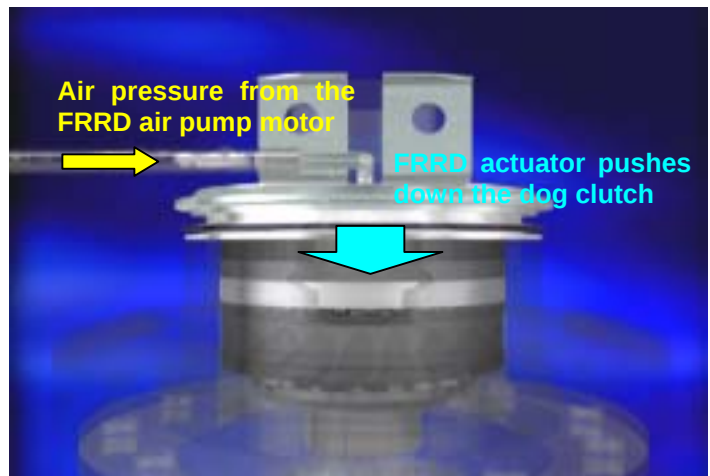

Air pressure from the FRRD air pump motor pushes down the dog clutch inside FRRD making the differential pinion shaft be coupled with the differential housing.


The diagram shows a vertical shaft assembly. At the top, a horizontal axle with two wheels is connected to a central vertical shaft via a coupling labeled "FRRD INSTALLATION". An arrow indicates the axle rotates. Below this, a box labeled "ENGINE" is connected to the vertical shaft. A large curved arrow shows the engine's rotation being transferred down the shaft. At the bottom, another horizontal axle with two wheels is connected to the shaft, with arrows indicating its rotation. The word "TRANSFER" is written next to the central shaft.

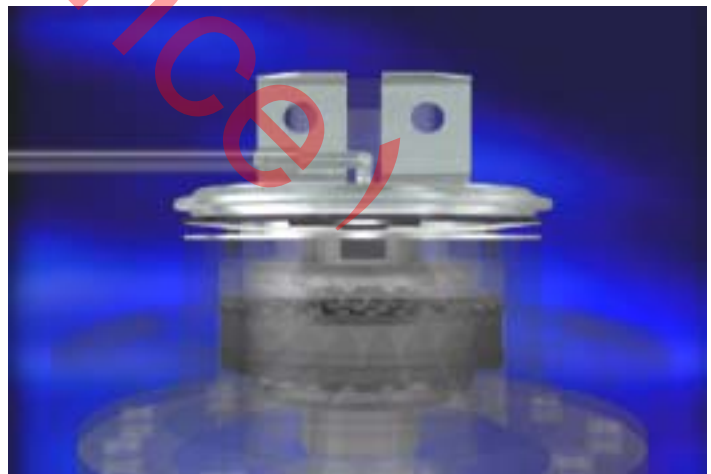

The FRRD air pump motor does not operate and the differential pinion shaft rotates freely. Therefore the mechanical connection between the front wheels and the transfer case is cut off.

SORENTO PART TIME 4WD SYSTEM (EST)



3.4 COMPONENTS

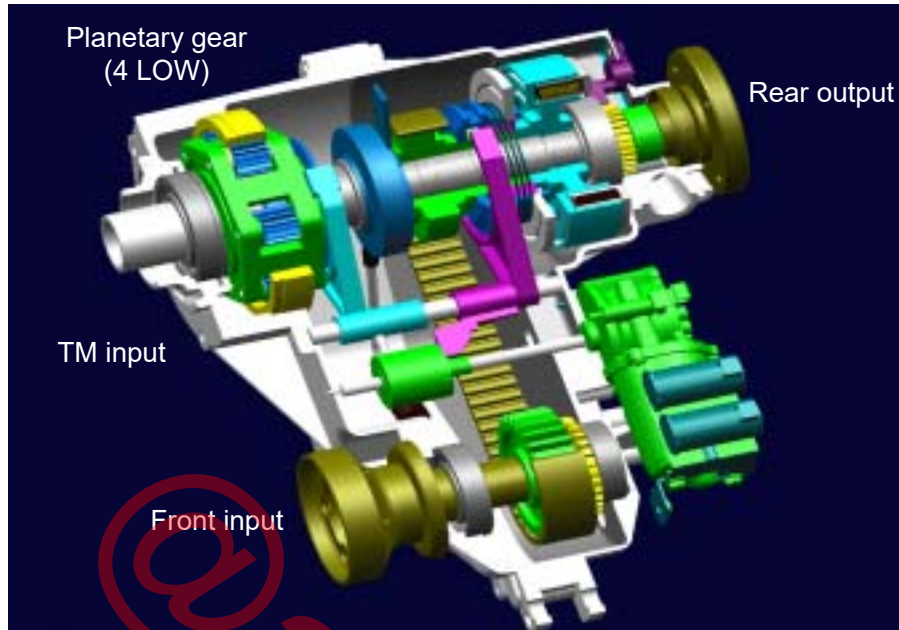


EST case and TOD case looks almost same. But inside it, EST and TOD has some different part for a part time or a full time mechanism.

In case of EST, a lock-up fork and a lock-up collar is added for a part time mechanism. And EST only has a rear output speed sensor differently from a TOD transfer case which has a front output speed sensor as well.

A 4 low mode transfer part which has a planetary gear set to make an output gear ratio of 2.48:1 is the same as that of TOD.

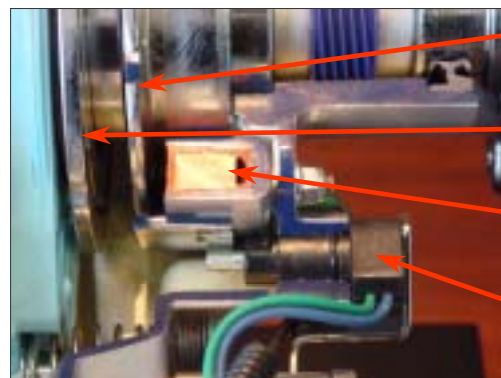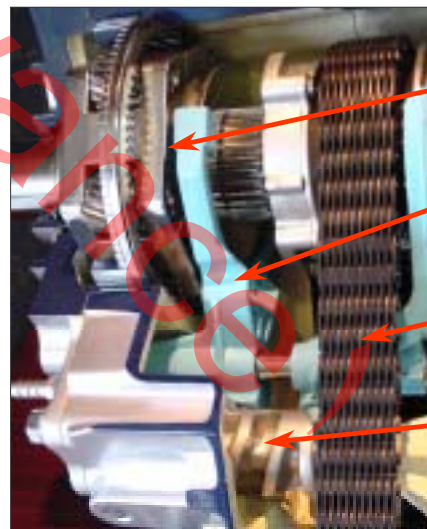


SORENTO PART TIME 4WD SYSTEM (EST)

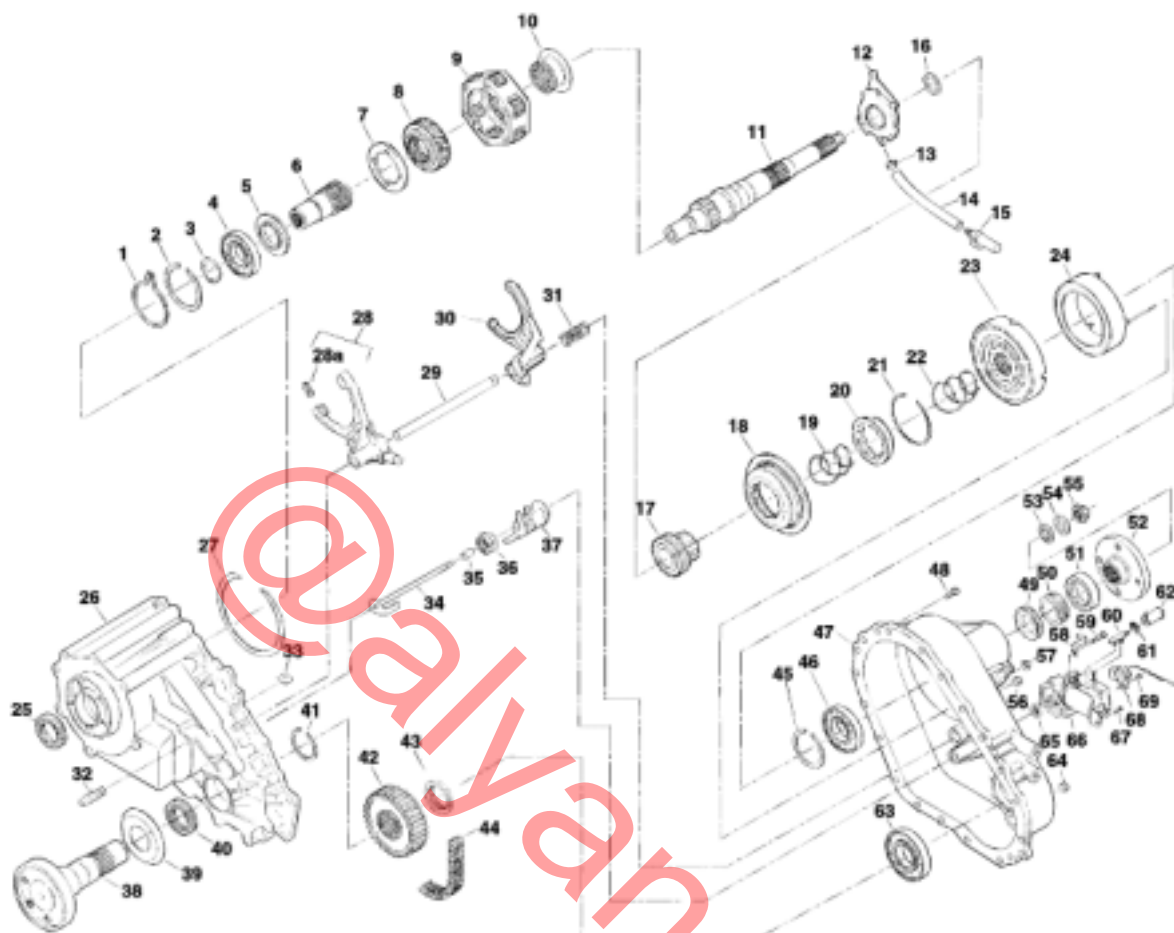

- | | | | |
|--------------------------|---------------------|----------------------|--------------------|
| 1. Snap ring | 21. Snap ring | 41. Snap ring | 61. Connector lock |
| 2. Snap ring | 22. Spring | 42. Lower sprocket | 62. Connector |
| 3. Snap ring | 23. Clutch housing | 43. Spacer | 63. Bearing |
| 4. Bearing | 24. Electric coil | 44. Chain | 64. Plug |
| 5. Hub | 25. Oil seal | 45. Retaining ring | 65. Oil seal |
| 6. Input shaft | 26. Transfer case | 46. Bearing | 66. Electric motor |
| 7. Thrust plate | 27. Retaining ring | 47. Cover | 67. Bolt |
| 8. Sun gear | 28. Shift fork | 48. Nut | 68. Speed sensor |
| 9. Carrier | 28a. Shift fork pad | 49. Tone wheel | 69. Bolt |
| 10. Reduction hub | 29. Shift rail | 50. Speedo gear | |
| 11. Main shaft | 30. Lock-up fork | 51. Oil seal | |
| 12. Rotor pump | 31. Return spring | 52. Companion flange | |
| 13. Hose clamp | 32. Breather | 53. Oil seal | |
| 14. Hose | 33. Magnet | 54. Washer | |
| 15. Filter | 34. Shift shaft | 55. Nut | |
| 16. Thrust washer | 35. Spacer | 56. Pipe plug | |
| 17. Upper sprocket | 36. Torsion spring | 57. Nut | |
| 18. Lock-up collar | 37. Shift cam | 58. 'J' clip | |
| 19. Sleeve return spring | 38. Output shaft | 59. Bolt | |
| 20. Lock-up hub | 39. Dust deflector | 60. Clip | |
| | 40. Oil seal | | |

SORENTO PART TIME 4WD SYSTEM (EST)


3.5 POWER FLOW

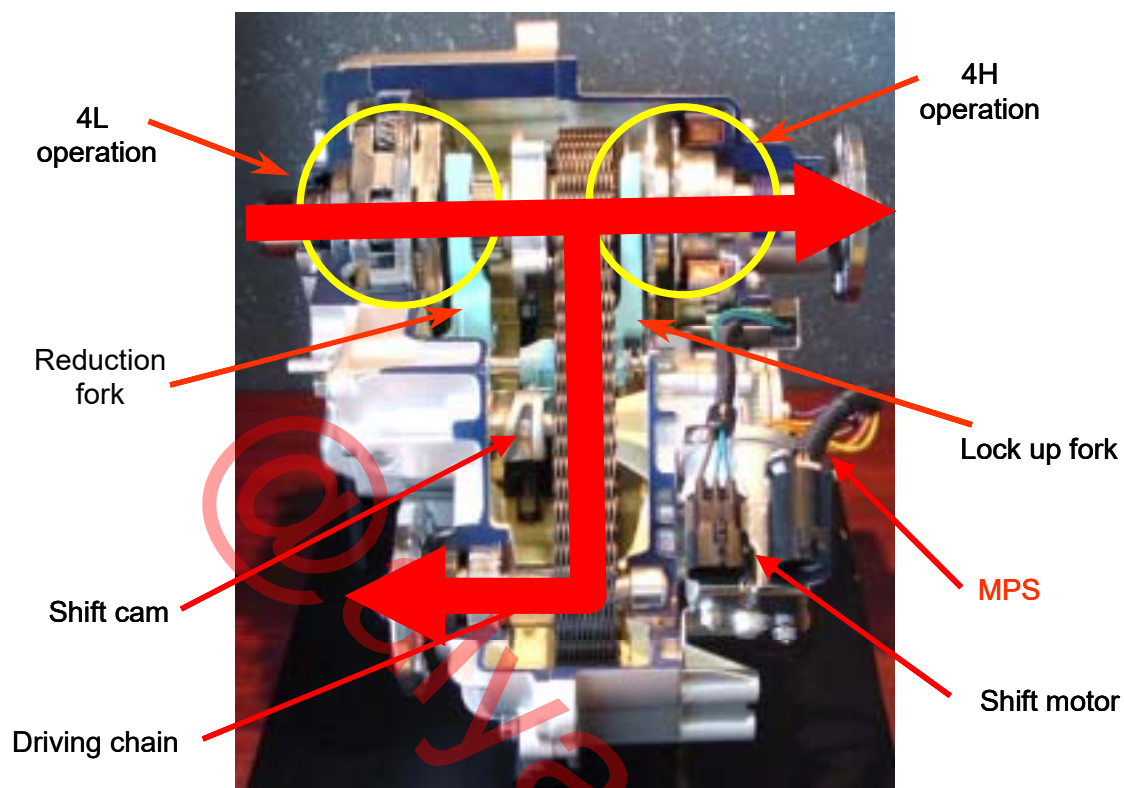

LOCK-UP SHIFT FORK

Comparing with the TOD transfer, EST has one more shift fork for engaging 2WD and 4WD. That is a 'Lock up shift fork'.


	EST	TOD
Reduction shift fork	Yes	Yes
Lock up shift fork	Yes	No

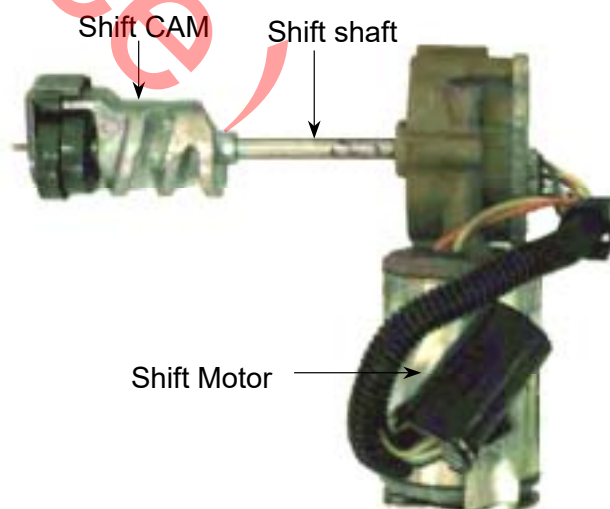

SORENTO PART TIME 4WD SYSTEM (EST)


1) POWER FLOW: 2H Mode (Rear Wheel Drive)

At 2H mode, driving force coming from a transmission output shaft directly delivered to the rear output shaft. A shift motor does not operate making a lock-up shift fork remain still. However, driving chain that transfers the rear output speed to the front output shaft can rotate because of the front wheel rotation while driving. The front wheel rotation is transferred into the transfer case rotating a drive chain. To prevent this, front drive shaft and front propeller shaft connected with a transfer case should be disconnected at 2H mode. FRRD(FRee Running Differential) is a kind of center axle disconnect system for that purpose.

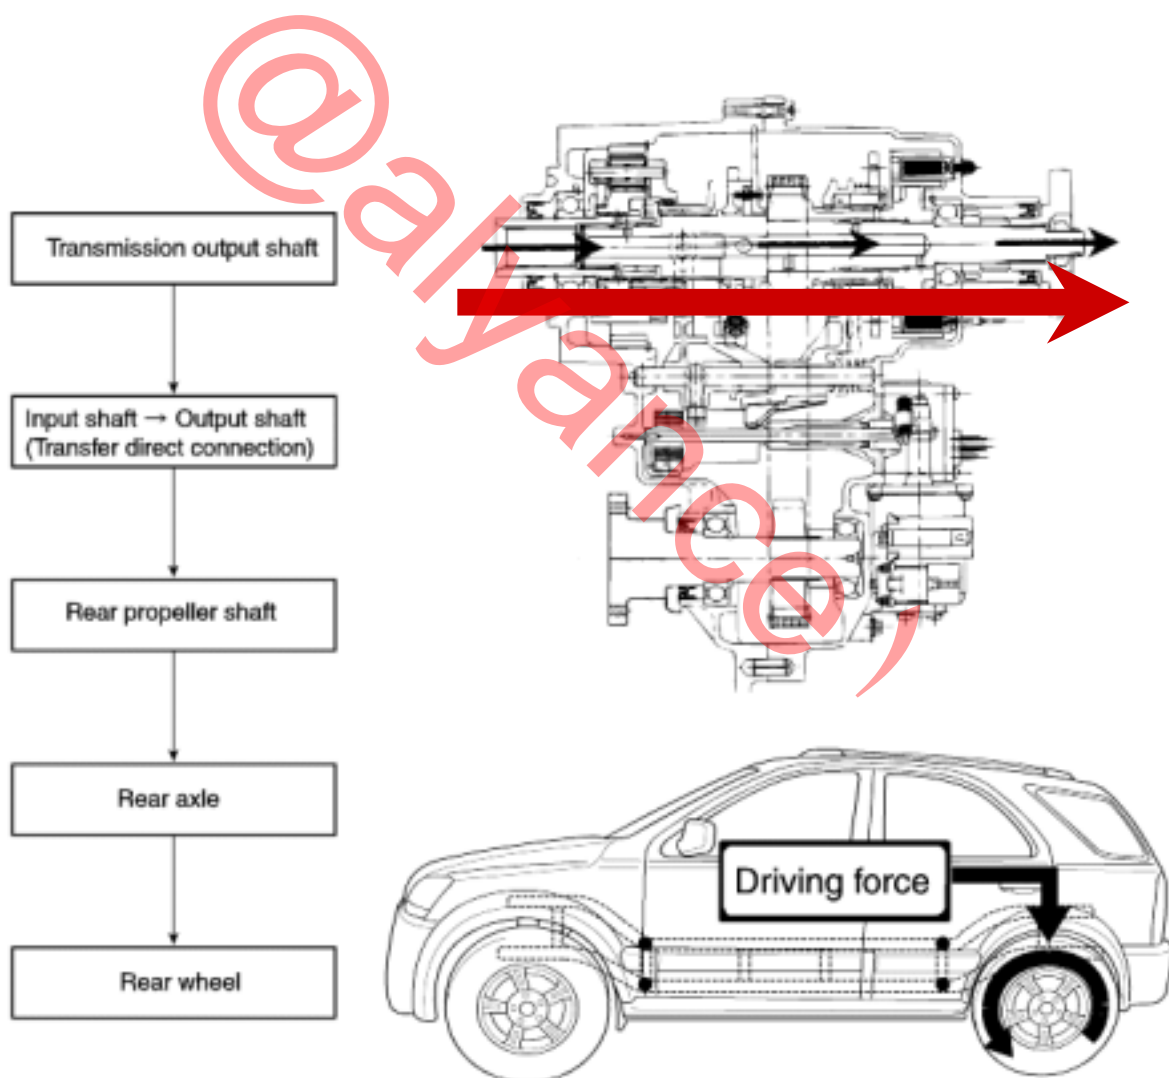

SORENTO PART TIME 4WD SYSTEM (EST)


2) POWER FLOW: 4H Mode

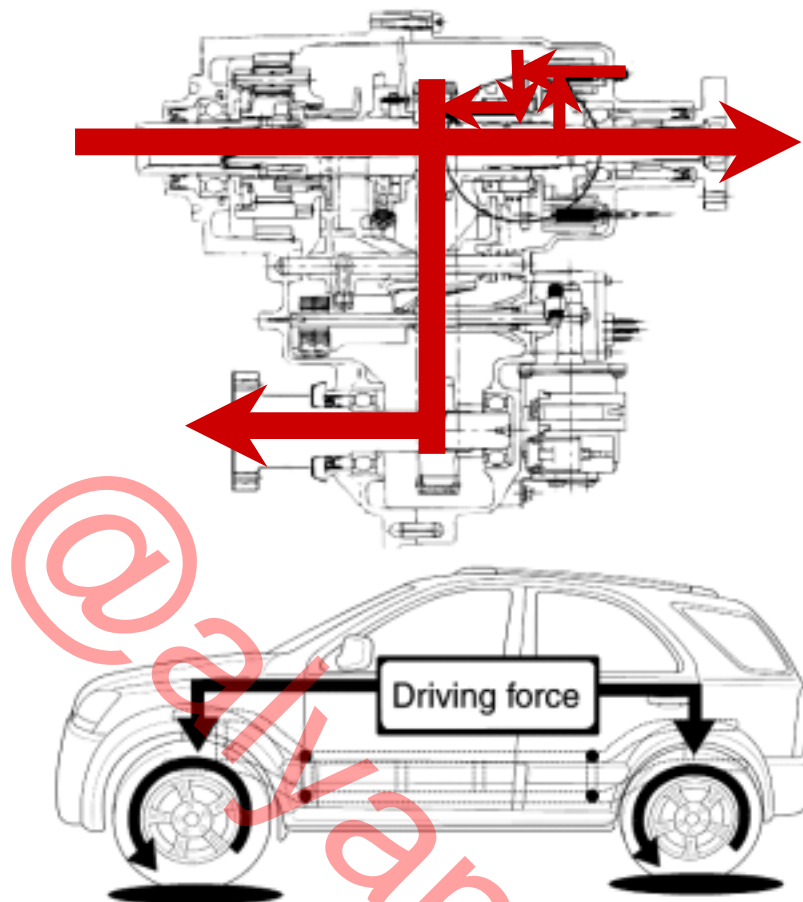

At 4H mode, TCCM(Transfer Case Control Module) sends a signal to the shift motor to rotate. Shift motor rotation slides up a lock-up shift fork which is connected a lock-up shift collar.


The Shift collar is engaged an upper sprocket that drives a drive chain delivering a drive force to the front shaft as soon as a magnetic clutch is on.

At the moment, TCCM also send a signal to the FRRD air pump motor in order to connect a center axle.

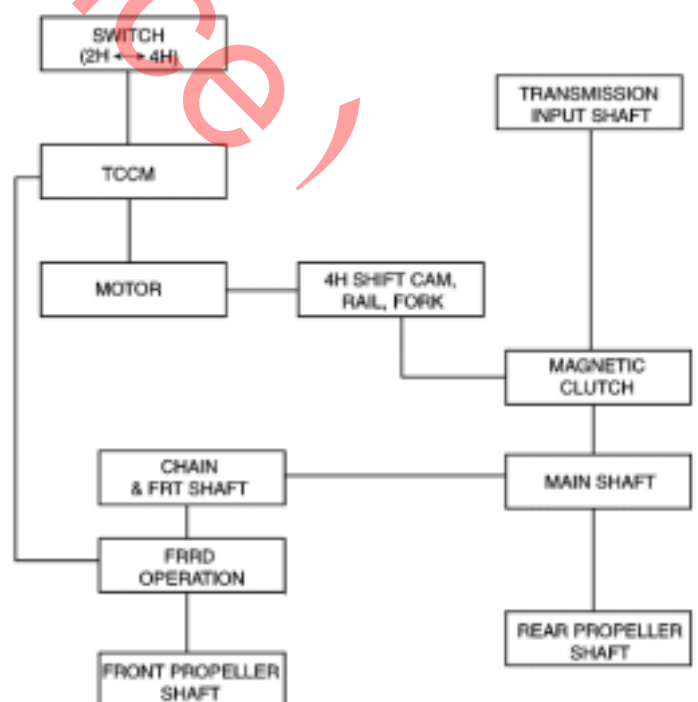


SORENTO PART TIME 4WD SYSTEM (EST)

* 2WD engagement

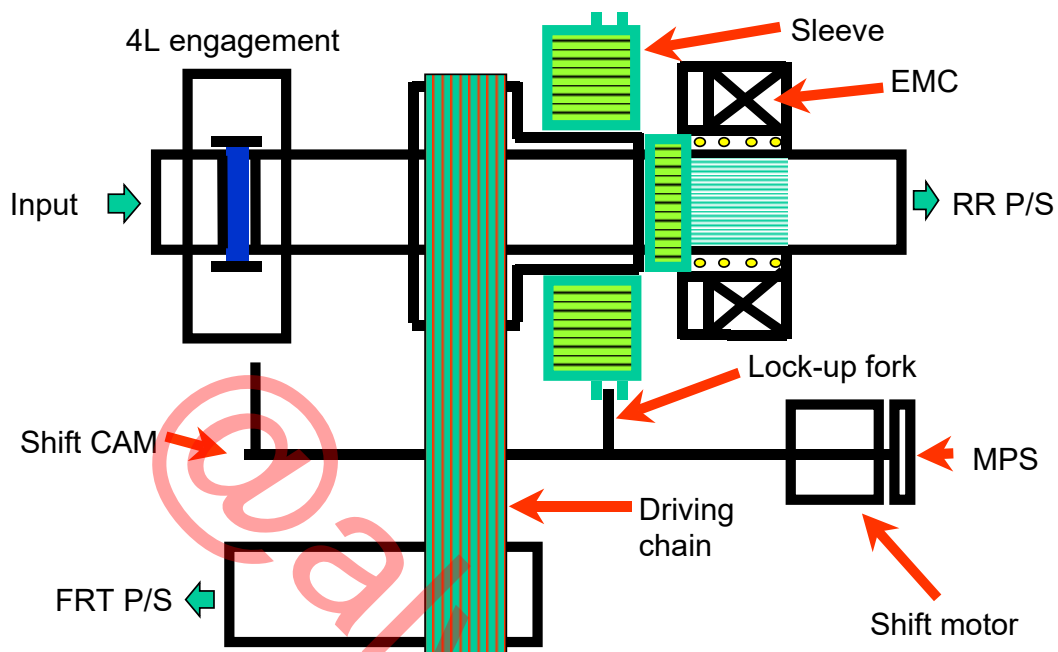

* 4WD engagement

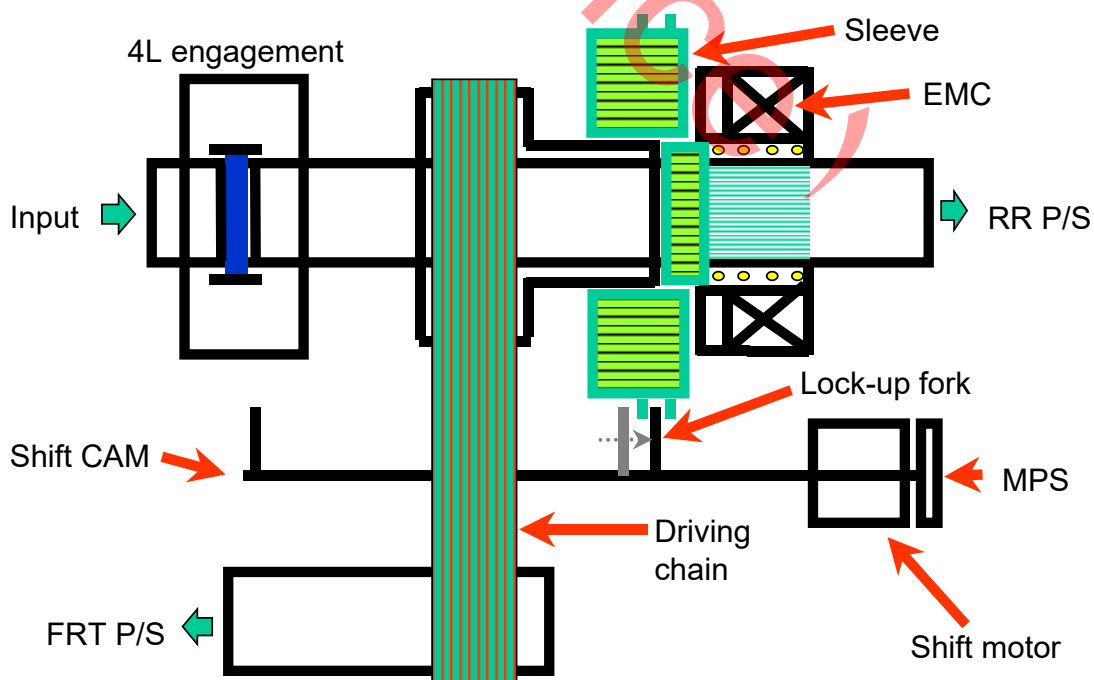

SORENTO PART TIME 4WD SYSTEM (EST)


3) POWER FLOW: 4L Mode

At 4L mode, TCCM (Transfer Case Control Module) sends a signal to the shift motor to rotate. Shift fork as well as a lock-up shift fork which is connected a lock-up shift collar slides up by shift motor rotation.

A reduction hub slide outward along the shift fork and a planetary gear is engaged making a lower speed. The output gear ratio is 2.48:1 and the vehicle can get more driving torque than it is in a 4H mode.


A lock-up shift collar slide outward along the lock-up shift fork and it is engaged with an upper sprocket that drives a drive chain delivering a drive force to the front shaft as soon as a magnetic clutch is on.

At the moment, TCCM also send a signal to the FRRD air pump motor in order to connect a center axle connection. If a 4L mode is selected from a 4H mode, then the FRRD air pump motor keeps ON and center axle connection remains engaged.

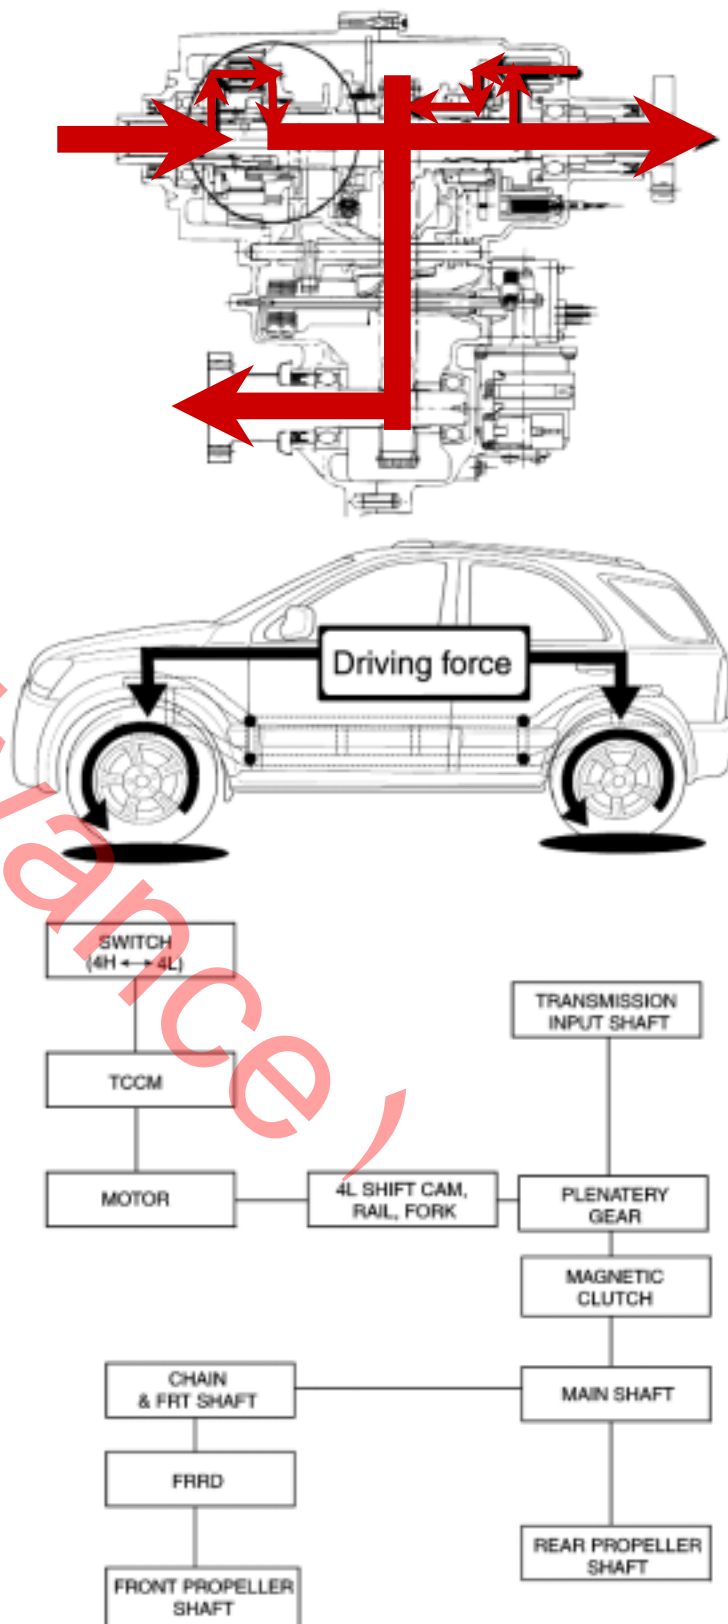

SORENTO PART TIME 4WD SYSTEM (EST)


* Planetary gear engagement (1:1 connection – 2H, 4H)

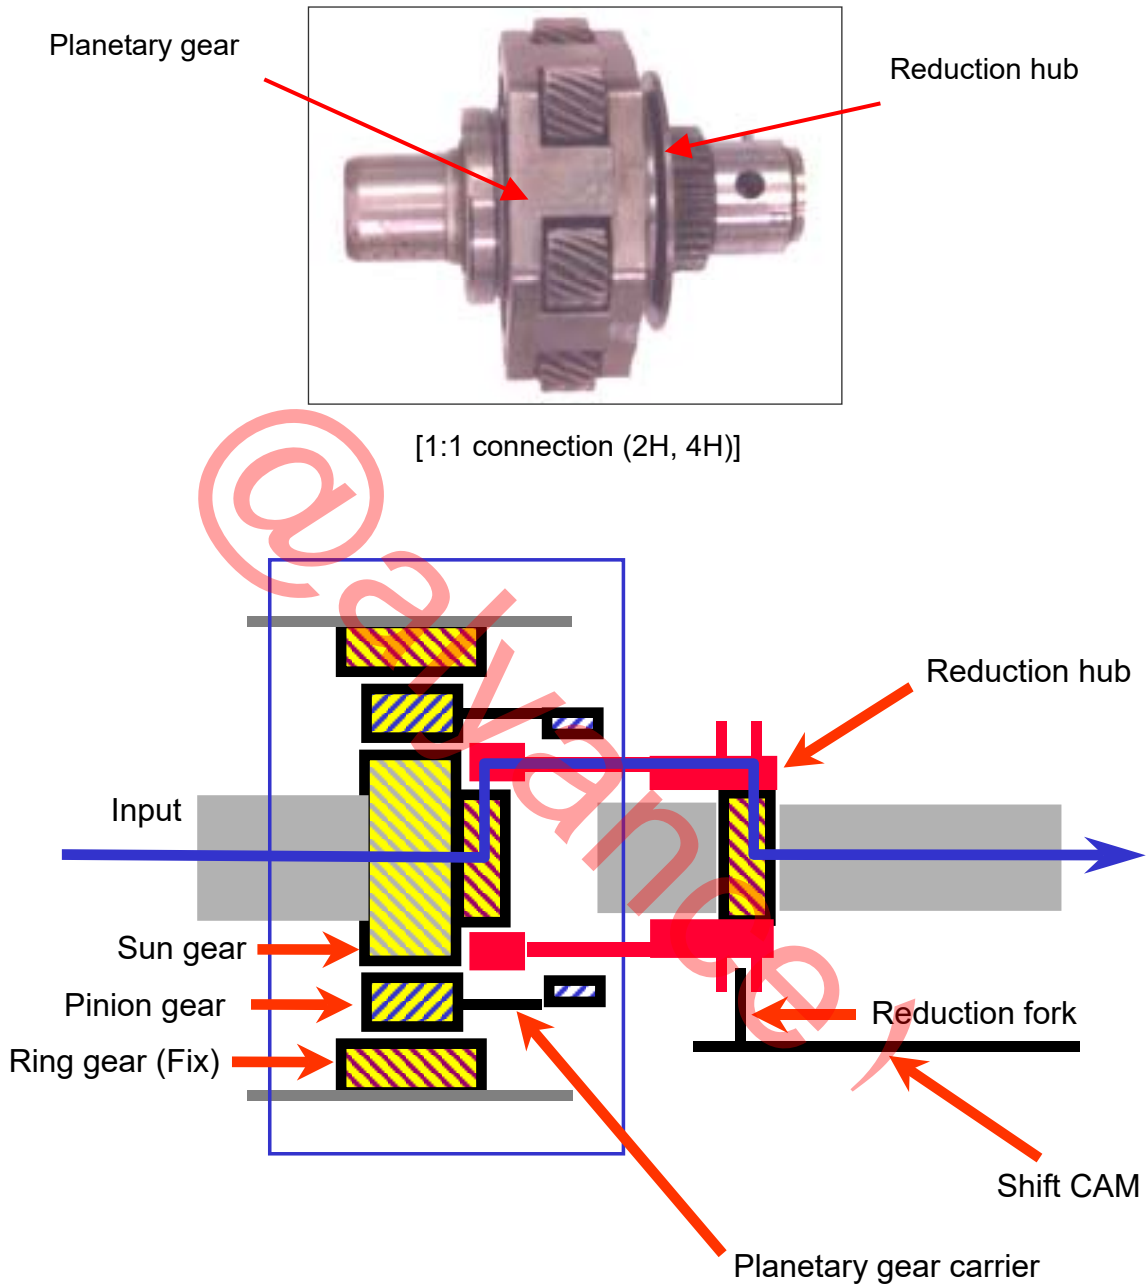

TM output comes into the input shaft of the transfer. At 2H or 4H mode, the planetary gear is not involved because the reduction hub, when it moves inward the planetary gear, is not connected with a planetary pinion gear carrier. Therefore input shaft is directly coupled with the rear output shaft allowing the same revolution speed of the both shafts.

SORENTO PART TIME 4WD SYSTEM (EST)

* Planetary gear engagement (4L mode)

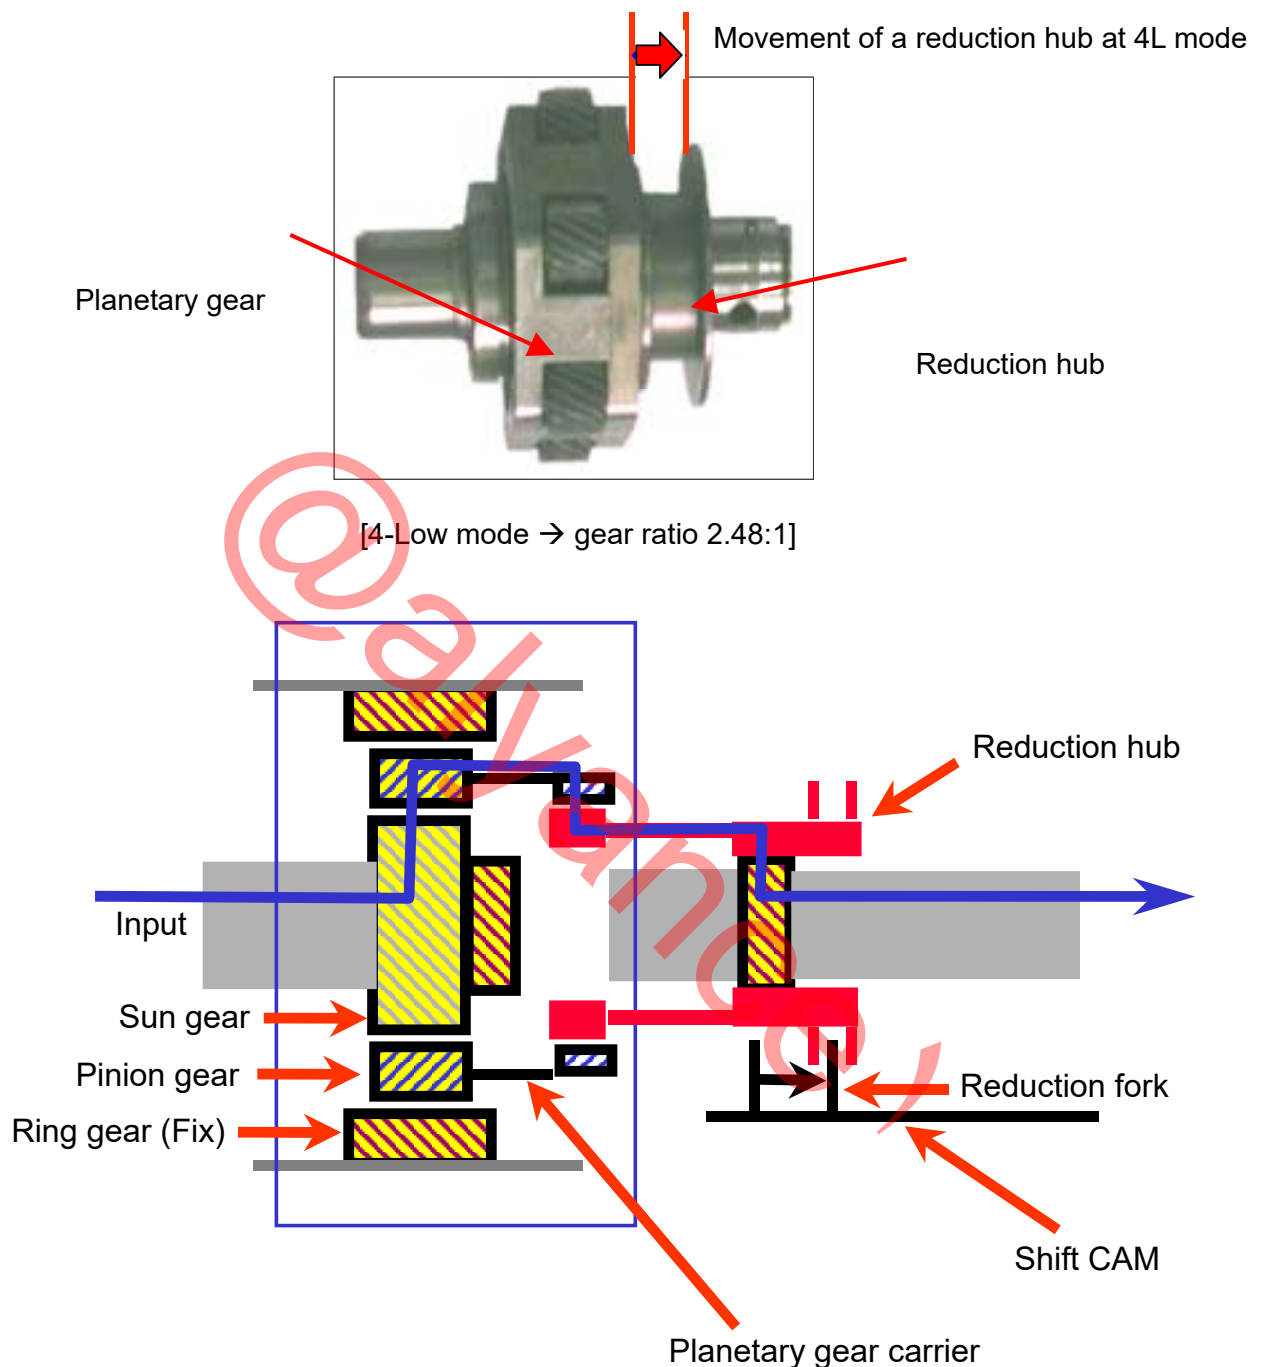

TM output comes into the input shaft of the transfer. At 4L mode, the planetary gear is involved because the reduction hub, when it moves outward the planetary gear, is connected with a planetary pinion gear carrier. Therefore input shaft is coupled with the planetary gear and then is delivered to the rear output shaft allowing 2:48:1 revolution speed difference between the input shaft speed and the rear output shaft speed.

3.6 COMPONENTS

1) Mode selection switch

- **2H mode:** Rear wheel drive mode
- **4H mode:** Transferring from 2WD to 4WD can be achieved even while vehicle driving. (SOTF: Shift On The Fly). At this time, the vehicle speed should not be over than 80km/h. If the shift is successfully finished, the 4WD High lamp will be turned on.
- **4L mode:** The vehicle should be stopped (3km/h or less). At the moment a shift lever should be positioned "N" position(A/T) or a "Clutch" pedal should be ON before selecting a 4L mode.

After a mode change is successfully finished, the 4L lamp will be turned on.




SORENTO PART TIME 4WD SYSTEM (EST)

2) Shift motor & Motor position sensor

When a driver selects a driving mode, a mode signal comes to a TCCM. Then the TCCM operates a shift motor.


There is a MPS(Motor Position Sensor) inside the motor contacting a position plate which sends a motor position signal to the TCCM. TCCM can get a feedback of a driving mode position.

If the MPS sends to the TCCM different position signals from a mode switch position, a relevant failure code is memorized.

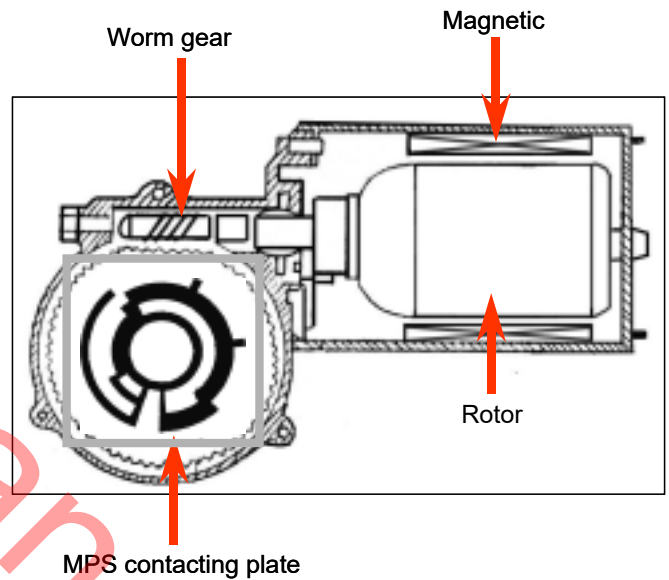


[Shift motor operation while shifting]

2H → 4H → 4L

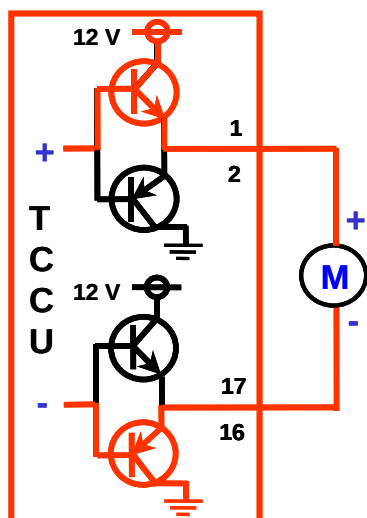


4L → 4H → 2H

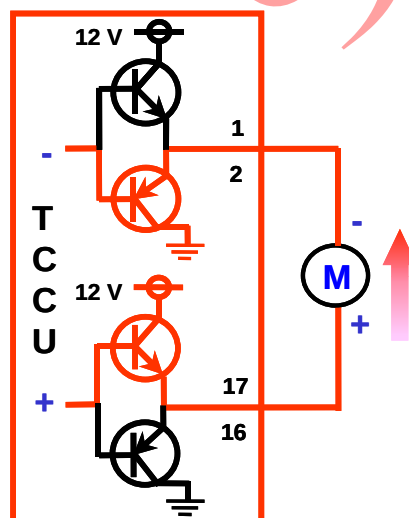


SORENTO PART TIME 4WD SYSTEM (EST)

* Motor position sensor

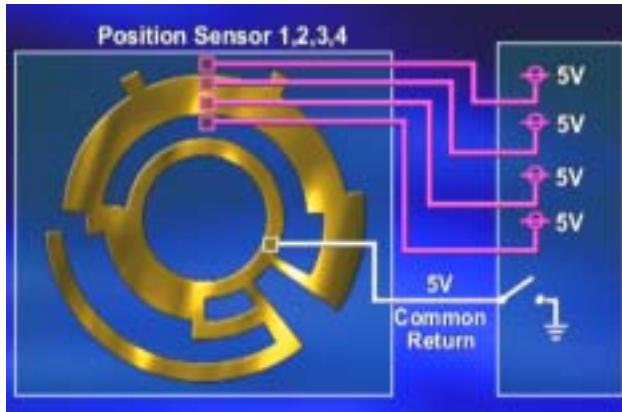


[Sensor output voltage at 2H/4H/4L mode]
The common return terminal is off-grounded.
The output voltage of position sensor 1,2,3,4 keeps 5 volts.

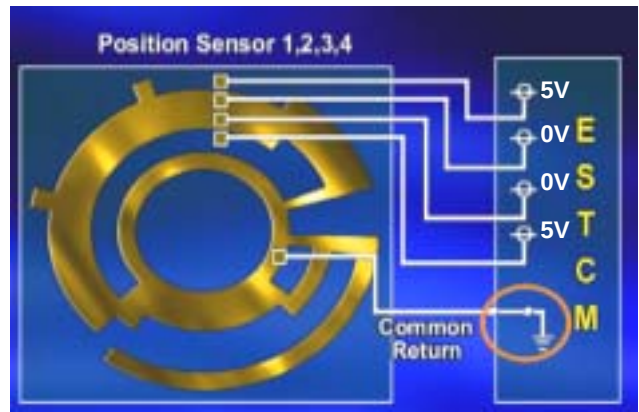


[Sensor output voltage while being shifted]
The common return terminal is grounded for 7 seconds. The output voltage of sensor which contacts the steel plate drops 0 volts.


MPS output signal (2H→ 4H)

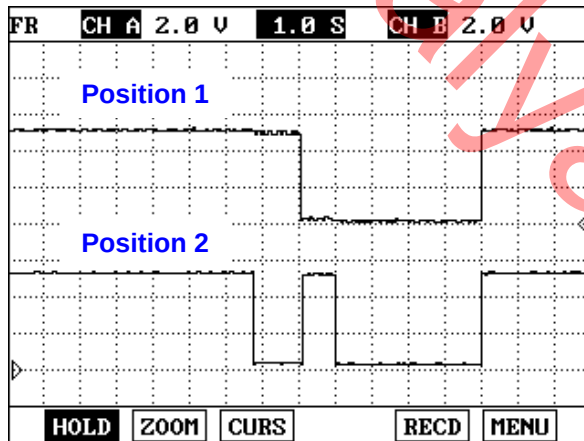


MPS output signal (4H→ 4L)

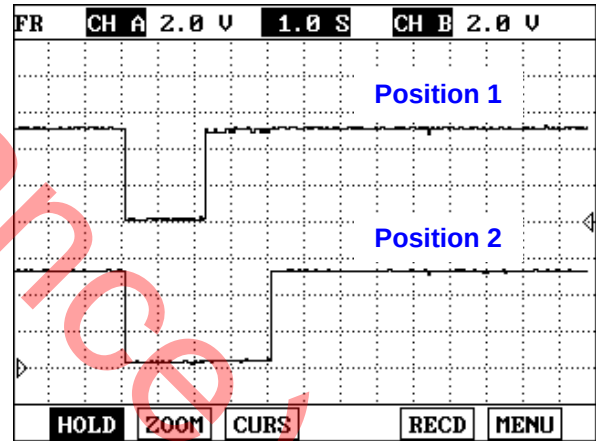

MPS output signal (2H→ 4H)

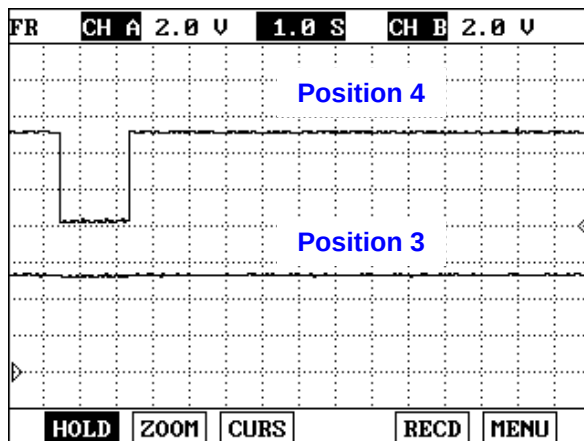



MPS output signal (4H→ 4L)

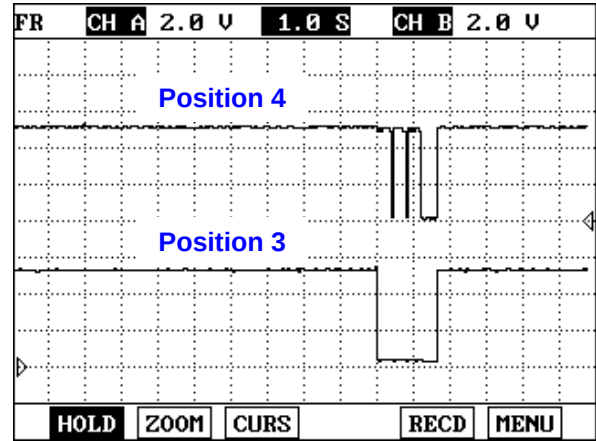


SORENTO PART TIME 4WD SYSTEM (EST)

3) EMC(Electronic Magnetic Clutch) signal

EMC is energized to pull the lock-up shift fork to make 4H mode.

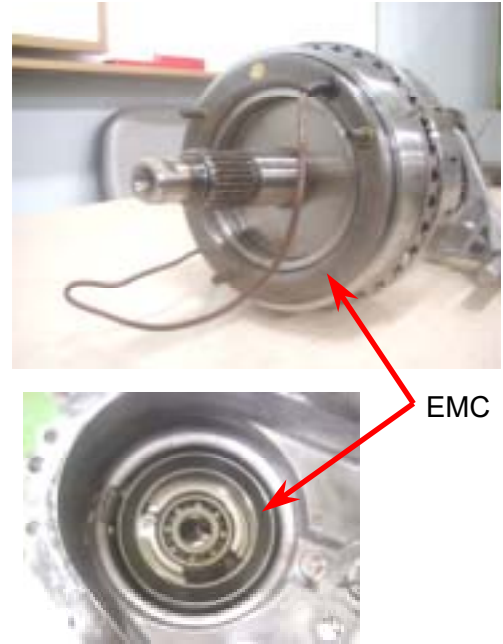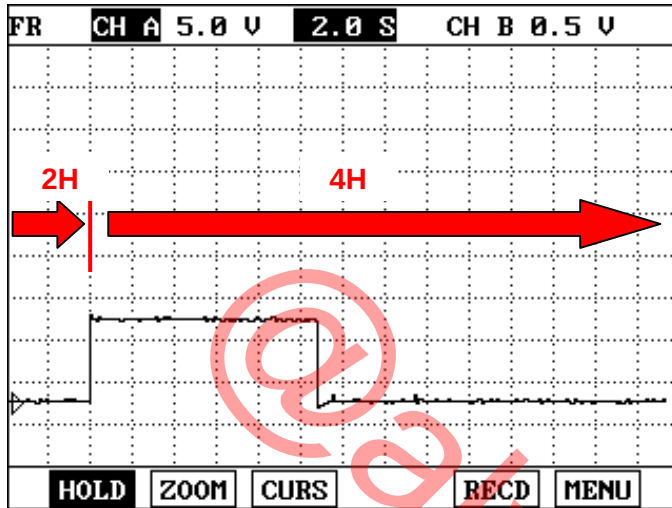

3.7 INPUT AND OUTPUT

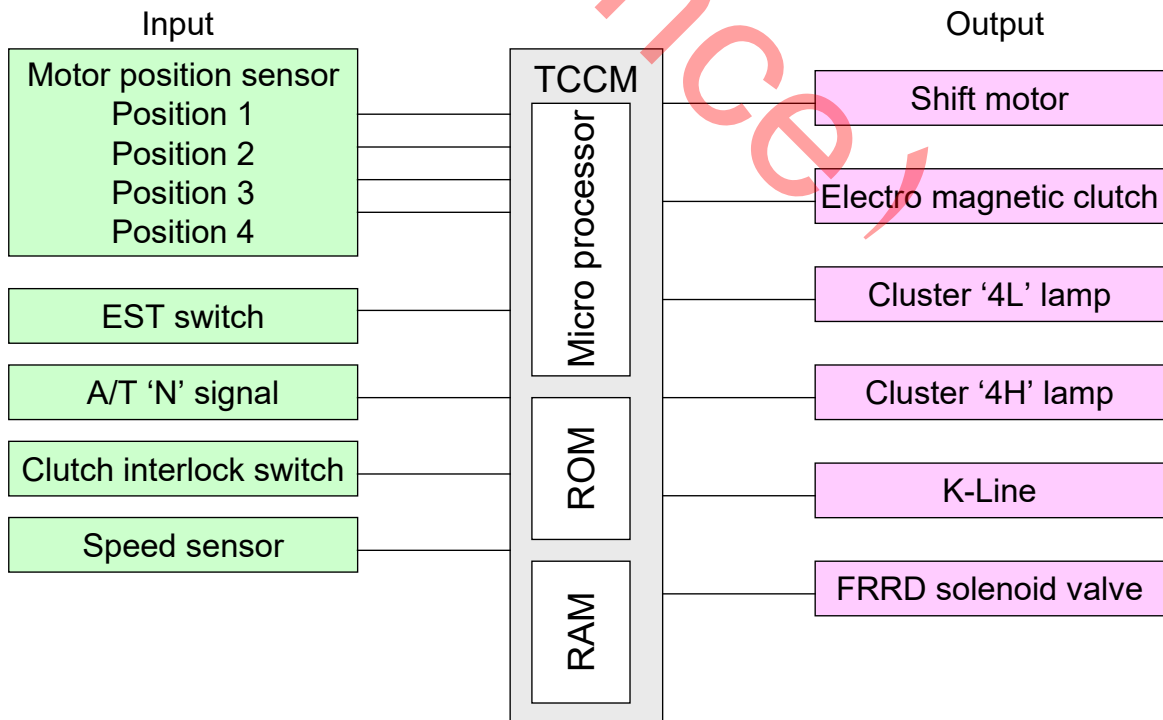

SORENTO PART TIME 4WD SYSTEM (EST)

3.8 DIAGNOSIS

1) TCCM & DLC location



2) DTC

There is no P-code for EST system. DTC is supported with binary code. The binary fault code shall be displayed if a corresponding input or output part is failed.


Decimal	Binary	Fault
1	001	TCCM (Transfer case control module)
2	010	Shift motor
3	011	EMC (Electro magnetic clutch)
4	100	Speed sensor
5	101	FRRD air pump motor
6	110	2H-4H-4L switch
7	111	MPS (Motor position sensor)

SORENTO PART TIME 4WD SYSTEM (EST)

3) EST standard input and output value in TCCM

No		Items	Condition	Signal		Remarks
				Type	Level	
1	A1	MOTOR OUTPUT (2H-4H-4L)	IDLE("N")	DC	Vbatt	* Current : INRUSH(+) : 4.64A INRUSH(-) : 4.4A Operation : 0.6A
				↑	0V	
2	A2	MOTOR OUTPUT (2H-4H-4L)	IDLE("N")	DC	Vbatt	
				↑	0V	
3	A3	GND				
4	A4	CLUTCH COIL (2H → 4H → 4L)	IDLE	DC	Vbatt	* Current : 4.28A
				↑	0V	
5	A5	POSITION 1 MTR (P/R/N/D/2/L)	IDLE 2H 2H → 4H 4H → 4L	CODE : 1010 CODE : 0011 CODE : 1100 LOGIC HI(1) : 5V LOGIC LO(0) : 0.5V or less	* MTR POS. CODE : 1/2/3/4 = XXXX (1 = 5V dc) (0 ≤ 0.5V dc)	
6	A6	SPEED SNSR	IDLE	PULSE  135Hz at 60KPH	* VSS of 60KPH : HI : 16.4V LO : -6.4V	
7	A7	2H SW	SW OFF	DC	4.5 5.5V	
			SW ON	↑	0.5V or less	
8	A8	4H DISPLAY	SW OFF	DC	Vbatt	
			SW ON	↑	0.5V or less	
9	A9	BATT	IGN OFF	DC	Vbatt	
			IGN ON	↑	Vbatt	
10	A10	BATT	IGN OFF	DC	Vbatt	
			IGN ON	↑	Vbatt	
11	A11	GND				
12	A12	POSITION 2 MTR (P/R/N/D/2/L)	IDLE 2H 2H → 4H 4H → 4L	CODE : 1010 CODE : 0011 CODE : 1100 LOGIC HI(1) : 5V LOGIC LO(0) : 0.5V or less	* MTR POS. CODE : 1/2/3/4 = XXXX (1 = 5V dc) (0 ≤ 0.5V dc)	

SORENTO PART TIME 4WD SYSTEM (EST)

No	Items	Condition	Signal		Remarks
			Type	Level	
13	A13	4L SW	SW OFF	DC 4.5 5.5V	
		SW ON	↑	0.5V or less	
14	A14	INHIBITOR SW(AT N	DC	0V	
		CLUTCH INTERLOCK	↑	5V	
		SW(MT)			
15	A15	4L DISPLAY	IDLE("N")	DC Vbatt	
			↑	0V	
16	A16	MOTOR OUTPUT (4L-4H-2H)	IDLE("N")	DC Vbatt	
			↑	0V	
17	A17	MOTOR OUTPUT (4L-4H-2H)	IDLE("N")	DC Vbatt	
			↑	0V	
18	A18	COMMON RETURN	IGN OFF	DC 0.9V or less	
		IGN ON	↑	4.75 5.25V	
19	A19	IGN 1	IGN OFF	DC 0V	
		IGN ON	↑	Vbatt	
20	A20	POSITION 4 MTR	IDLE (P/R/N/D/2/L)	2H CODE : 1010 2H → 4H CODE : 0011 4H → 4L CODE : 1100 LOGIC HI(1) : 5V LOGIC LO(0) : 0.5V or less	* MTR POS. CODE : 1/2/3/4 = XXXX (1 = 5V dc) (0 ≤ 0.5V dc)
21	A21	POSITION 3 MTR	IDLE (P/R/N/D/2/L)	2H CODE : 1010 2H → 4H CODE : 0011 4H → 4L CODE : 1100 LOGIC HI(1) : 5V LOGIC LO(0) : 0.5V or less	* MTR POS. CODE : 1/2/3/4 = XXXX (1 = 5V dc) (0 ≤ 0.5V dc)
22	A22	DIA. DISPLAY	In comm.	PULSE  4V or more 0 0.9V	
23	A23	C.A.D.S	IDLE (2H → 4H)	OFF Vbatt	
			ON	0.5V or less	

The diagram illustrates the electrical connections for the Transfer Case Control Module (TCCM). Key components and their connections include:

- 3 WY SPEED SENSOR COIL CONNECTOR:** Connected to the TCCM connector pins 1, 2, and 3.
- BATTERY:** Provides power to the system, connected to the TCCM connector pin 4.
- SWITCH 1:** Connected to the TCCM connector pin 5.
- POSITION MOTOR:** Connected to the TCCM connector pins 6, 7, and 8.
- SHIFT MOTOR:** Connected to the TCCM connector pins 9, 10, and 11.
- 4 LAMP:** Connected to the TCCM connector pin 12.
- 4H LAMP:** Connected to the TCCM connector pin 13.
- TRANSFER CASE CONTROL MODULE (TCCM):** A 24-pin module with the following connections:
 - Pins 1-3: 3 WY SPEED SENSOR COIL CONNECTOR
 - Pins 4-5: BATTERY
 - Pins 6-8: POSITION MOTOR
 - Pins 9-11: SHIFT MOTOR
 - Pins 12-13: 4 LAMP
 - Pins 14-15: 4H LAMP
 - Pins 16-17: 4 L SWITCH
 - Pins 18-19: SPEED SENSOR
 - Pins 20-21: POSITION 3 MOTOR
 - Pins 22-23: POSITION 4 MOTOR
 - Pins 24-25: POSITION 5 MOTOR
 - Pins 26-27: POSITION 6 MOTOR
 - Pins 28-29: POSITION 7 MOTOR
 - Pins 30-31: POSITION 8 MOTOR
 - Pins 32-33: POSITION 9 MOTOR
 - Pins 34-35: POSITION 10 MOTOR
 - Pins 36-37: POSITION 11 MOTOR
 - Pins 38-39: POSITION 12 MOTOR
 - Pins 40-41: POSITION 13 MOTOR
 - Pins 42-43: POSITION 14 MOTOR
 - Pins 44-45: POSITION 15 MOTOR
 - Pins 46-47: POSITION 16 MOTOR
 - Pins 48-49: POSITION 17 MOTOR
 - Pins 50-51: POSITION 18 MOTOR
 - Pins 52-53: POSITION 19 MOTOR
 - Pins 54-55: POSITION 20 MOTOR
 - Pins 56-57: POSITION 21 MOTOR
 - Pins 58-59: POSITION 22 MOTOR
 - Pins 60-61: POSITION 23 MOTOR
 - Pins 62-63: POSITION 24 MOTOR
 - Pins 64-65: POSITION 25 MOTOR
 - Pins 66-67: POSITION 26 MOTOR
 - Pins 68-69: POSITION 27 MOTOR
 - Pins 70-71: POSITION 28 MOTOR
 - Pins 72-73: POSITION 29 MOTOR
 - Pins 74-75: POSITION 30 MOTOR
 - Pins 76-77: POSITION 31 MOTOR
 - Pins 78-79: POSITION 32 MOTOR
 - Pins 80-81: POSITION 33 MOTOR
 - Pins 82-83: POSITION 34 MOTOR
 - Pins 84-85: POSITION 35 MOTOR
 - Pins 86-87: POSITION 36 MOTOR
 - Pins 88-89: POSITION 37 MOTOR
 - Pins 90-91: POSITION 38 MOTOR
 - Pins 92-93: POSITION 39 MOTOR
 - Pins 94-95: POSITION 40 MOTOR
 - Pins 96-97: POSITION 41 MOTOR
 - Pins 98-99: POSITION 42 MOTOR
 - Pins 100-101: POSITION 43 MOTOR
 - Pins 102-103: POSITION 44 MOTOR
 - Pins 104-105: POSITION 45 MOTOR
 - Pins 106-107: POSITION 46 MOTOR
 - Pins 108-109: POSITION 47 MOTOR
 - Pins 110-111: POSITION 48 MOTOR
 - Pins 112-113: POSITION 49 MOTOR
 - Pins 114-115: POSITION 50 MOTOR
 - Pins 116-117: POSITION 51 MOTOR
 - Pins 118-119: POSITION 52 MOTOR
 - Pins 120-121: POSITION 53 MOTOR
 - Pins 122-123: POSITION 54 MOTOR
 - Pins 124-125: POSITION 55 MOTOR
 - Pins 126-127: POSITION 56 MOTOR
 - Pins 128-129: POSITION 57 MOTOR
 - Pins 130-131: POSITION 58 MOTOR
 - Pins 132-133: POSITION 59 MOTOR
 - Pins 134-135: POSITION 60 MOTOR
 - Pins 136-137: POSITION 61 MOTOR
 - Pins 138-139: POSITION 62 MOTOR
 - Pins 140-141: POSITION 63 MOTOR
 - Pins 142-143: POSITION 64 MOTOR
 - Pins 144-145: POSITION 65 MOTOR
 - Pins 146-147: POSITION 66 MOTOR
 - Pins 148-149: POSITION 67 MOTOR
 - Pins 150-151: POSITION 68 MOTOR
 - Pins 152-153: POSITION 69 MOTOR
 - Pins 154-155: POSITION 70 MOTOR
 - Pins 156-157: POSITION 71 MOTOR
 - Pins 158-159: POSITION 72 MOTOR
 - Pins 160-161: POSITION 73 MOTOR
 - Pins 162-163: POSITION 74 MOTOR
 - Pins 164-165: POSITION 75 MOTOR
 - Pins 166-167: POSITION 76 MOTOR
 - Pins 168-169: POSITION 77 MOTOR
 - Pins 170-171: POSITION 78 MOTOR
 - Pins 172-173: POSITION 79 MOTOR
 - Pins 174-175: POSITION 80 MOTOR
 - Pins 176-177: POSITION 81 MOTOR
 - Pins 178-179: POSITION 82 MOTOR
 - Pins 180-181: POSITION 83 MOTOR
 - Pins 182-183: POSITION 84 MOTOR
 - Pins 184-185: POSITION 85 MOTOR
 - Pins 186-187: POSITION 86 MOTOR
 - Pins 188-189: POSITION 87 MOTOR
 - Pins 190-191: POSITION 88 MOTOR
 - Pins 192-193: POSITION 89 MOTOR
 - Pins 194-195: POSITION 90 MOTOR
 - Pins 196-197: POSITION 91 MOTOR
 - Pins 198-199: POSITION 92 MOTOR
 - Pins 200-201: POSITION 93 MOTOR
 - Pins 202-203: POSITION 94 MOTOR
 - Pins 204-205: POSITION 95 MOTOR
 - Pins 206-207: POSITION 96 MOTOR
 - Pins 208-209: POSITION 97 MOTOR
 - Pins 210-211: POSITION 98 MOTOR
 - Pins 212-213: POSITION 99 MOTOR
 - Pins 214-215: POSITION 100 MOTOR
 - Pins 216-217: POSITION 101 MOTOR
 - Pins 218-219: POSITION 102 MOTOR
 - Pins 220-221: POSITION 103 MOTOR
 - Pins 222-223: POSITION 104 MOTOR
 - Pins 224-225: POSITION 105 MOTOR
 - Pins 226-227: POSITION 106 MOTOR
 - Pins 228-229: POSITION 107 MOTOR
 - Pins 230-231: POSITION 108 MOTOR
 - Pins 232-233: POSITION 109 MOTOR
 - Pins 234-235: POSITION 110 MOTOR
 - Pins 236-237: POSITION 111 MOTOR
 - Pins 238-239: POSITION 112 MOTOR
 - Pins 240-241: POSITION 113 MOTOR
 - Pins 242-243: POSITION 114 MOTOR
 - Pins 244-245: POSITION 115 MOTOR
 - Pins 246-247: POSITION 116 MOTOR
 - Pins 248-249: POSITION 117 MOTOR
 - Pins 250-251: POSITION 118 MOTOR
 - Pins 252-253: POSITION 119 MOTOR
 - Pins 254-255: POSITION 120 MOTOR
 - Pins 256-257: POSITION 121 MOTOR
 - Pins 258-259: POSITION 122 MOTOR
 - Pins 260-261: POSITION 123 MOTOR
 - Pins 262-263: POSITION 124 MOTOR
 - Pins 264-265: POSITION 125 MOTOR
 - Pins 266-267: POSITION 126 MOTOR
 - Pins 268-269: POSITION 127 MOTOR
 - Pins 270-271: POSITION 128 MOTOR
 - Pins 272-273: POSITION 129 MOTOR
 - Pins 274-275: POSITION 130 MOTOR
 - Pins 276-277: POSITION 131 MOTOR
 - Pins 278-279: POSITION 132 MOTOR
 - Pins 280-281: POSITION 133 MOTOR
 - Pins 282-283: POSITION 134 MOTOR
 - Pins 284-285: POSITION 135 MOTOR
 - Pins 286-287: POSITION 136 MOTOR
 - Pins 288-289: POSITION 137 MOTOR
 - Pins 290-291: POSITION 138 MOTOR
 - Pins 292-293: POSITION 139 MOTOR
 - Pins 294-295: POSITION 140 MOTOR
 - Pins 296-297: POSITION 141 MOTOR
 - Pins 298-299: POSITION 142 MOTOR
 - Pins 300-301: POSITION 143 MOTOR
 - Pins 302-303: POSITION 144 MOTOR
 - Pins 304-305: POSITION 145 MOTOR
 - Pins 306-307: POSITION 146 MOTOR
 - Pins 308-309: POSITION 147 MOTOR
 - Pins 310-311: POSITION 148 MOTOR
 - Pins 312-313: POSITION 149 MOTOR
 - Pins 314-315: POSITION 150 MOTOR
 - Pins 316-317: POSITION 151 MOTOR
 - Pins 318-319: POSITION 152 MOTOR
 - Pins 320-321: POSITION 153 MOTOR
 - Pins 322-323: POSITION 154 MOTOR
 - Pins 324-325: POSITION 155 MOTOR
 - Pins 326-327: POSITION 156 MOTOR
 - Pins 328-329: POSITION 157 MOTOR
 - Pins 330-331: POSITION 158 MOTOR
 - Pins 332-333: POSITION 159 MOTOR
 - Pins 334-335: POSITION 160 MOTOR
 - Pins 336-337: POSITION 161 MOTOR
 - Pins 338-339: POSITION 162 MOTOR
 - Pins 340-341: POSITION 163 MOTOR
 - Pins 342-343: POSITION 164 MOTOR
 - Pins 344-345: POSITION 165 MOTOR
 - Pins 346-347: POSITION 166 MOTOR
 - Pins 348-349: POSITION 167 MOTOR
 - Pins 350-351: POSITION 168 MOTOR
 - Pins 352-353: POSITION 169 MOTOR
 - Pins 354-355: POSITION 170 MOTOR
 - Pins 356-357: POSITION 171 MOTOR
 - Pins 358-359: POSITION 172 MOTOR
 - Pins 360-361: POSITION 173 MOTOR
 - Pins 362-363: POSITION 174 MOTOR
 - Pins 364-365: POSITION 175 MOTOR
 - Pins 366-367: POSITION 176 MOTOR
 - Pins 368-369: POSITION 17

4. TRANSFER OVERHAUL

4.1 DISASSEMBLY

* Prepare an EST unit on a table with proper tools.



1. Before overhaul, remove an EMC coil wire carefully from the connector.



* After removing the pin, correct the stopper of the pin using a driver.



2. Remove the shift motor assembly.



* After removing the shift motor assembly.



3. Remove the vehicle speed sensor.



4. Remove the lock nut.



SORENTO PART TIME 4WD SYSTEM (EST)

5. Remove the companion flange and the oil seal.



6. Remove the rear speed sensor.



7. Remove the cover bolts.



8. Remove the EMC coil nuts.



SORENTO PART TIME 4WD SYSTEM (EST)

* Check the rubber bush and extension housing.



9. Remove the oil seal.



* After removing the oil seal.



10. Remove the speedo gear.



SORENTO PART TIME 4WD SYSTEM (EST)

11. Remove the tone wheel.



12. Remove the case upper cover.



13. Remove the EMC coil and the coil housing.



* EMC coil and housing



SORENTO PART TIME 4WD SYSTEM (EST)

* EMC housing (bottom)



* EMC coil



14. Remove the 4H mode return spring.



15. Check the proper function of the lock-up assembly by pressing the lock-up hub.



SORENTO PART TIME 4WD SYSTEM (EST)

* Examine the wear on the face.



16. Remove the lock-up assembly and the shift-fork together.



* Lock-up assembly and the shift-fork



17. Inspect the 4H shift-fork and wear of fork pads.



SORENTO PART TIME 4WD SYSTEM (EST)

* After removing the lock-up assembly and the shift-fork




18. Remove the chain and sprocket together



19. Remove the magnet before removing the pump from the output shaft.



20. Rotate the output shaft to rotate inner pump gear and remove the pump assembly and the shaft together.

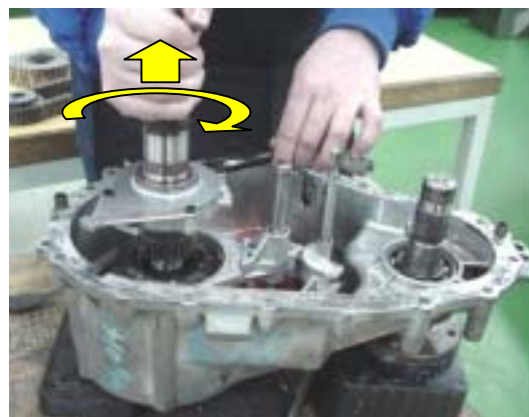

SORENTO PART TIME 4WD SYSTEM (EST)

21. Remove the spacer.



22. Lift pump of the shaft.



* Pump assembly is not a serviceable item and should be replaced as an assembly.



23. Inspection of the upper output shaft.



SORENTO PART TIME 4WD SYSTEM (EST)

- * Check the spline teeth for brakes, chipping, crack.



- * Check journals for excessive wear or discoloration.



- * After removing the output shaft



24. Remove the shift rail.



SORENTO PART TIME 4WD SYSTEM (EST)

25. Remove a shift cam.



26. Remove a reduction fork.



* Inspect the reduction fork. Check the fork pad for wear or discoloration from heat.



27. Remove a reduction hub.



SORENTO PART TIME 4WD SYSTEM (EST)

* Check the reduction hub teeth for wear, brakes, chipping, crack.



* Snap ring



28. Ply open the snap ring and pull out the planetary carrier assembly from the cover.



* After removal



SORENTO PART TIME 4WD SYSTEM (EST)

* Planetary carrier assembly



29. Remove a snap ring.



30. Remove a snap ring.



SORENTO PART TIME 4WD SYSTEM (EST)

31. Remove the input gear assembly from the carrier assembly.



32. Disassemble the input gear assembly using a press.



* Input shaft assembly



* Shift cam assembly



33. Disassemble shift cam assembly



* 4H lock-up assembly



34. Disassemble the 4H lock-up assembly by removing a snap ring between the cowl and lock-up hub



* 4H lock-up assembly



SORENTO PART TIME 4WD SYSTEM (EST)

4.2 DISASSEMBLY

1. Reassemble the sun gear to the input gear.

And install new input bearing snap ring.



After installation



2. Install the input assembly into the carrier assembly and then install the snap ring.



SORENTO PART TIME 4WD SYSTEM (EST)

3. Insert the shift cam assembly.



4. Place the reduction hub and the shift fork together into the carrier.



* After installation



SORENTO PART TIME 4WD SYSTEM (EST)

5. Slide the pump onto the shaft and align the drive pin on the slot in the pump.



6. Insert the output shaft into the input and reduction hub.



7. Insert the magnet into the case.



8. Install a spacer over the shaft onto the pump.



SORENTO PART TIME 4WD SYSTEM (EST)

* Location of the spacer.



9. Place the chain and sprocket on the shaft.



* After installation



10. Locate blue chain link which is always on the top side of chain facing up.



SORENTO PART TIME 4WD SYSTEM (EST)

11. Place the lock-up assembly and 4H shift fork on the sprocket aligning the lock-up collar teeth with the sprocket teeth.



* After installation



12. Place the coil housing on the shaft.



13. Install the shift fork return spring.



SORENTO PART TIME 4WD SYSTEM (EST)

14. Insert the coil in the case.



15. Install the EMC coil nuts.



16. Install cover bolts.



17. Install the speed sensor.



SORENTO PART TIME 4WD SYSTEM (EST)

18. Insert the coil pin to the connector.



19. Apply sealant to the shift motor seat on the case.



20. Install the shift motor on the case.



21. Attach wire retainer to the connector.



SORENTO PART TIME 4WD SYSTEM (EST)

* After installation



@alyance,